微信公众平台：qqpump

活力清泉
动力无限

全国服务热线
400-658-0576
http://www.cn-qq.com

QQPUMP
台州清泉泵业有限公司
TAIZHOU QINGQUAN PUMP CO.,LTD.

地址：浙江省台州市温岭市泽国镇光明工业区
Add: Guang Ming Industrial Zone, Zeguo Town, Wenling City, Zhejiang, China.

手机/Mob: 13116539990
电话/Tel: +86-576-86406868
传真/Fax: +86-576-86405858
http://www.cn-qq.com

全国服务热线
400-658-0576

台州清泉泵业有限公司
TAIZHOU QINGQUANPUMP CO.,LTD.

活力清泉
动力无限

COMPANY PROFILE
企业简介

台州清泉泵业有限公司，是一家专业于水泵设计，开发，生产，销售的厂家，公司主要产品有：不锈钢深井泵、潜水泵、排污泵、自吸泵、管道泵、其产品性价合理，质量可靠，广泛应用于市政、水利、建筑、消防、电力、环保等领域。

本公司拥有完整、科学的质量管理体系，拥有强大的技术队伍，现代化的生产设备，装备精良的流水线和精密的检测设备，为用户全力提供最优质的服务和最可靠的品质。

公司本着以客户为中心，客户的满意是我们的最终目标，用户的口碑是我们不变的宣传口号，希望以诚信、实力和产品质量获得业界的认可。欢迎各界朋友莅临参观、指导和业务洽谈。

Taizhou water pump Co. Ltd., is a professional in the pump design, development, production and sales of manufacturers, the company's main products are: stainless steel deep well pump, submersible pump, sewage pump, self-priming pump, pipeline pump, its products and reasonable price, reliable quality, widely used in the field of municipal, water conservancy, construction, fire electric power, environmental protection, etc..

The company has a complete and scientific quality management system, has a strong technical team, modern production equipment, well-equipped production lines and sophisticated testing equipment, for the user to provide the best quality service and most reliable quality.

The company in the customer centered, customer satisfaction is our ultimate goal, the user's reputation is our constant propaganda slogan, hope to be in good faith, strength and quality of products recognized by the industry. Welcome friends from all walks of life come to visit, guidance and business negotiation.

PRODUCT CATALOG
产品目录

SOLAR PUMP

Features and benefits

1.Brushless DC motor without Hall sensors, high reliability. Solar energy starts.
Adopt stainless steel screw and rubber stator, permanent magnet brushless motor, with combination of motor and controller, the Max efficiency is over 85%, raise 25% than traditional AC pump.
2. High technique products adopting MPPT and DSP chip technique. The MCU can detect the circuit automatically and can be displayed by LED.
3.The system can be operated automatically by groundwater and tank level detection, as well as current and voltage detection. When the current is overloaded, the system can start automatically.
4.water level detector / sensor is used to connect the controller and can be used to protect the pump from interference and to shut off the pump automatically when the tank is full.
5.Intelligent modular design, simple, affordable maintenance.

PERFORMANCE TABLE

Model	Pump	Power	Voltage	Max flow (m^3/h)	Max head (m)	Outlet (inch)
4SSC5-45-48-500	4SP2/4	500	48	5	45	1.25"
4SSC5-67-48-750	4SP2/6	750	48	5	67	1.25"
4SSC5-67-72-750	4SP2/6	750	72	5	67	1.25"
4SSC5-101-110-1100	4SP2/9	1100	110	5	101	1.25"
4SSC5-146-110-1300	4SP2/13	1300	110	5	146	1.25"
4SSC4.5-203-110-1500	4SP2/18	1500	110	4.5	203	1.25"
4SSC7-67-110-1300	4SP3/6	1300	110	7	67	1.25"
4SSC7-79-110-1500	4SP3/7	1500	110	7	79	1.25"
4SSC9-59-110-1500	4SP5/5	1500	110	9	59	1.5"

Model	Pump	Power	Voltage	Max flow (m^3/h)	Max head (m)	Outlet (inch)
3SC3-25-24-200	3SDM1.8/5	200	24	3	25	1"
3SC3-47-48-400	3SDM1.8/10	400	48	3	47	1.25"
3SC3-80-48-600	3SDM1.8/15	600	48	3	80	1.25"
3SC3-80-72-600	3SDM1.8/15	600	72	3	80	1.25"
3SC3-95-48-750	3SDM1.8/15	750	48	3	95	1.25"
3SC3-95-72-750	3SDM1.8/15	750	72	3	95	1.25"
3SC3.8-123-110-1100	3SDM1.8/15	1100	110	3.8	123	1.25"
3SC3.8-180-110-1500	3SDM1.8/22	1500	110	3.8	180	1.25"

Model	Pump	Power	Voltage	Max flow (m^3/h)	Max head (m)	Outlet (inch)
4SC6-42-48-600	4SDM2/3	600	48	6	42	1.25"
4SC6-42-72-600	4SDM2/3	600	72	6	42	1.25"
4SC6-56-48-750	4SDM2/4	750	48	6	56	1.25"
4SC6-56-72-750	4SDM2/4	750	72	6	56	1.25"
4SC6-84-110-1100	4SDM2/6	1100	110	6	84	1.25"
4SC6-112-110-1300	4SDM2/8	1300	110	6	112	1.25"
4SC6-135-110-1500	4SDM2/10	1500	110	6	135	1.25"
4SC8.5-58-110-1300	4SDM4/4	1300	110	8.5	58	2"
4SC8.5-71-110-1500	4SDM4/5	1500	110	8.5	71	2"
4SC11-60-110-1500	4SDM6/5	1500	110	11	60	2"

Q90QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Q90QJ系列特点

1、体积小，全扬程，全电压，适合家用，民用；
2、油浸式电机，可潜水深度100米，接插式电缆，容易更换；
3、水泵使用环境：常温清水；
4、马达自动保护；
5、单相180V—230V/50Hz；
6、内置电容，使用方便。

Q90QJ Series features

1.Small size, full lift range, full voltage, suitable for household and commercial use;
2.Submersible motor that can dive to the depth or 100 meters; easily replaced plug-in cable;
3.Pump use environment: room temperature, clear water:
4.Motor automatic protection.
5.Single-phase 180V-230V/50Hz
6.Easy to use built-in cupaliton.

Q90QJ系列型号示例

Series Products Model Example

Q90 QJ D 2 - 51 /12 - 0.8

- 额定功率 Rated power
- 叶轮级数 Impeller progression
- 额定扬程 Rated lift
- 额定流量 Rated flow rate
- 单相（三相不标注）Single phase (three phase)
- 井用潜水电泵 Submersible pump for well
- 系列型号 Series number

Q90QJ-2T

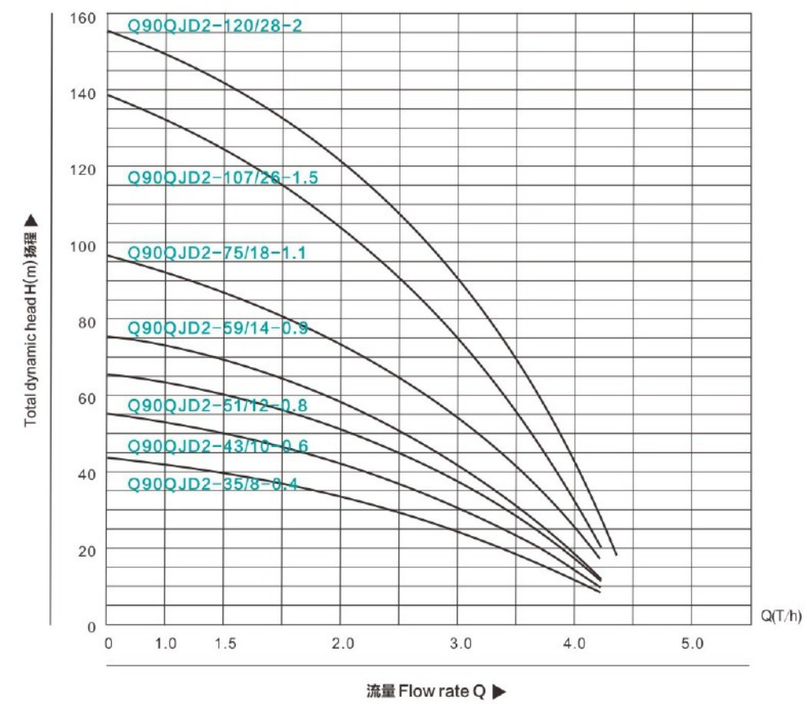

Q90QJ-2T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	1	1.5	2	3	4
Q90QJD2-35/8-0.4	220/380	0.4	1.0"	88	扬程(m) Rang of lift	45	43	41	35	26	11
Q90QJD2-43/10-0.6	220/380	0.6	1.0"	88		56	53	50	43	32	15
Q90QJD2-51/12-0.8	220/380	0.8	1.0"	88		66	63	59	51	37	17
Q90QJD2-59/14-0.9	220/380	0.9	1.0"	88		77	73	69	59	43	18
Q90QJD2-75/18-1.1	220/380	1.1	1.0"	88		98	93	88	75	54	27
Q90QJD2-107/26-1.5	220/380	1.5	1.0"	88		140	133	125	107	77	36
Q90QJD2-120/28-2	220/380	2	1.0"	88		157	149	140	120	86	40

Q90QJ

不锈钢井用潜水泵系列
stainless steel well submersible pump series

Q90QJ-3T

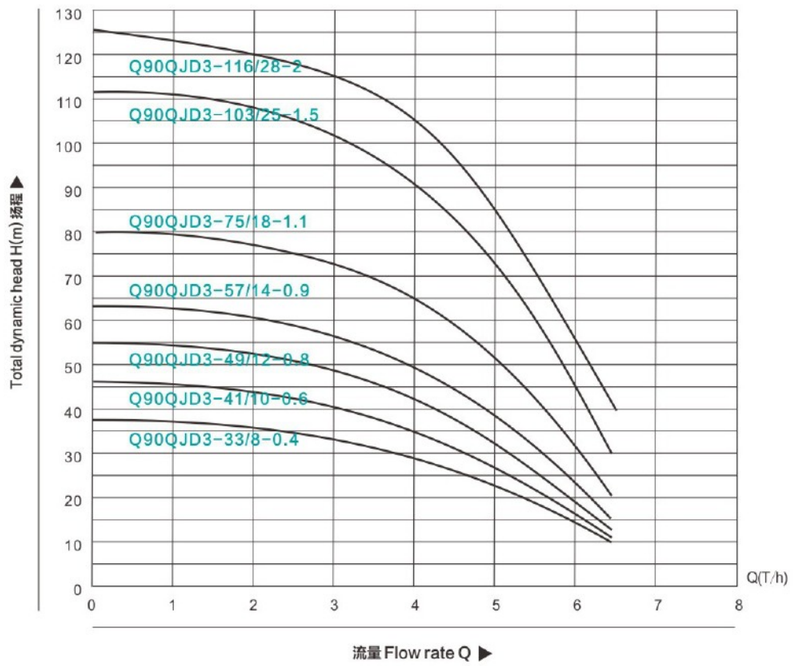

Q90QJ-3T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	2	3	4	5	6
Q90QJD3-33/8-0.4	220/380	0.4	1.0"	88	扬程(m) Rang of lift	38	36	33	28	22	13
Q90QJD3-41/10-0.6	220/380	0.6	1.0"	88		46	44	41	35	26	17
Q90QJD3-49/12-0.8	220/380	0.8	1.0"	88		55	52	49	39	30	19
Q90QJD3-57/14-0.9	220/380	0.9	1.0"	88		63	60	57	49	37	23
Q90QJD3-75/18-1.1	220/380	1.1	1.0"	88		81	76	73	65	51	31
Q90QJD3-103/25-1.5	220/380	1.5	1.0"	88		111	107	103	91	73	49
Q90QJD3-116/28-2	220/380	2	1.0"	88		125	120	116	109	82	55

Q100QJ 不锈钢井用潜水泵系列
stainless steel well submersible pump series

Q100QJ系列特点

1.流量大，全扬程，全电压，适合家用，民用；（高性价比）
2.油浸式电机，可潜水深度120米，接插式电缆，容易更换；
3.水泵使用环境：常温清水；
4.电容内置，安装方便；
5.马达自动保护
6.单相180V—230V/50Hz

Q100QJ Series features

1.Large flow rate, full lift range, full voltage, suitable for household and commercial use;(high price/performance ratio)
2.Submersible motor that can dive to the depth of 120 meters; eaily replaced plug-in cable;
3.Pump use environmet; room temperature, clear water;
4.Built-in capacitance, easy installation;
5.Motor automatic protection
6.Single-phase 180V-230V/50Hz

Q100QJ系列型号示例
Series Products Model Example

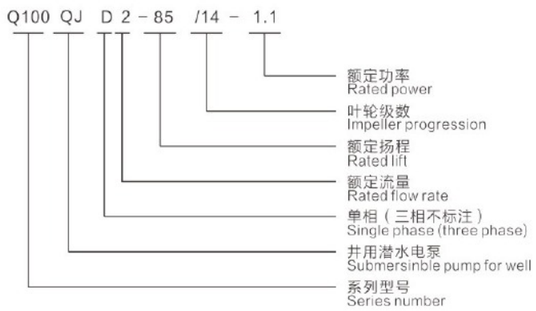

Q100QJ

不锈钢井用潜水泵系列
stainless steel well submersible pump series

Q100QJ-2T

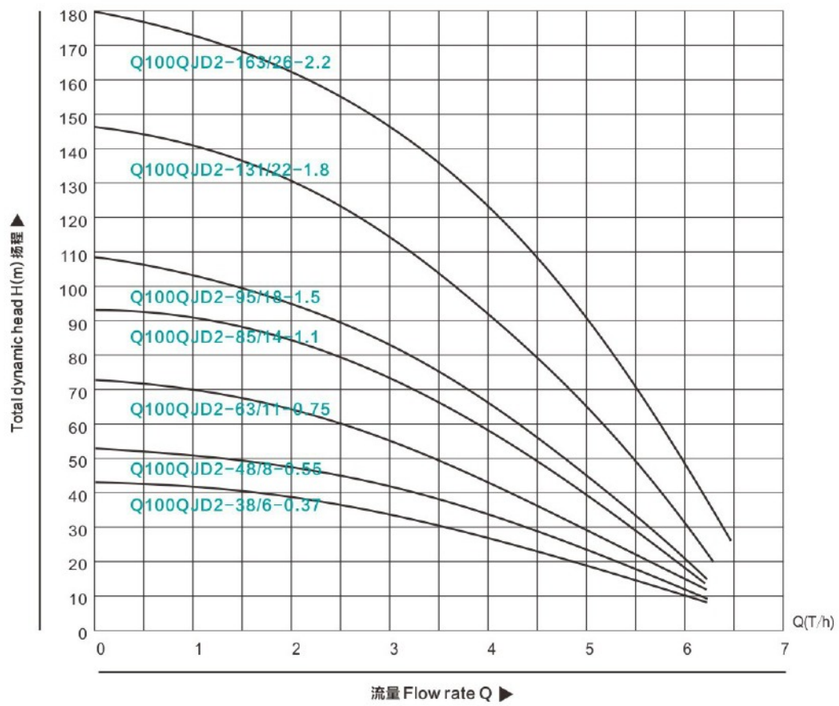

Q100QJ-4T

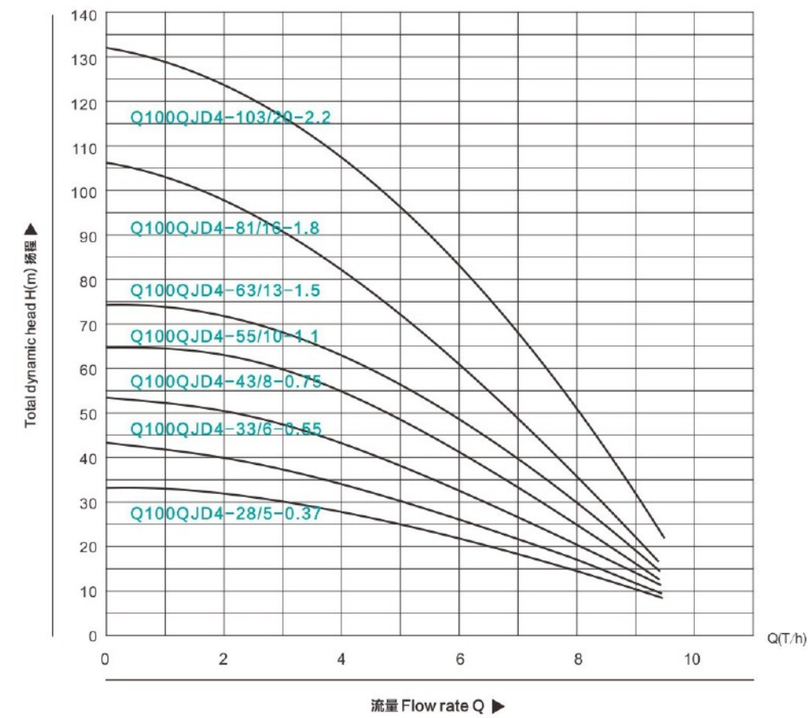

Q100QJ-2T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	1	2	3	4	5
Q100QJD2-38/6-0.37	220/380	0.37	1.0"	100	扬程(m) Rang of lift	43	40	38	32	27	18
Q100QJD2-48/8-0.55	220/380	0.55	1.0"	100		53	52	48	42	33	23
Q100QJD2-63/11-0.75	220/380	0.75	1.0"	100		73	71	63	54	43	28
Q100QJD2-85/14-1.1	220/380	1.1	1.0"	100		93	89	85	72	59	38
Q100QJD2-95/18-1.5	220/380	1.5	1.0"	100		108	101	95	71	67	43
Q100QJD2-131/22-1.8	220/380	1.8	1.0"	100		146	138	131	111	91	63
Q100QJD2-163/26-2.2	220/380	2.2	1.0"	100		180	172	163	135	111	81

Q100JD-4T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	2	3	4	5	6	7
Q100QJD4-28/5-0.37	220/380	0.37	1.5"	100	扬程(m) Rang of lift	33	30	29	28	25	21	18
Q100QJD4-33/6-0.55	220/380	0.55	1.5"	100		43	39	37	33	30	26	20
Q100QJD4-43/8-0.75	220/380	0.75	1.5"	100		53	49	47	43	38	32	25
Q100QJD4-55/10-1.1	220/380	1.1	1.5"	100		65	61	60	55	48	40	33
Q100QJD4-63/13-1.5	220/380	1.5	1.5"	100		75	71	68	63	56	48	39
Q100QJD4-81/16-1.8	220/380	1.8	1.5"	100		106	98	91	81	71	60	48
Q100QJD4-103/20-2.2	220/380	2.2	1.5"	100		132	122	113	103	89	75	60

Q100QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Q100QJ-6T

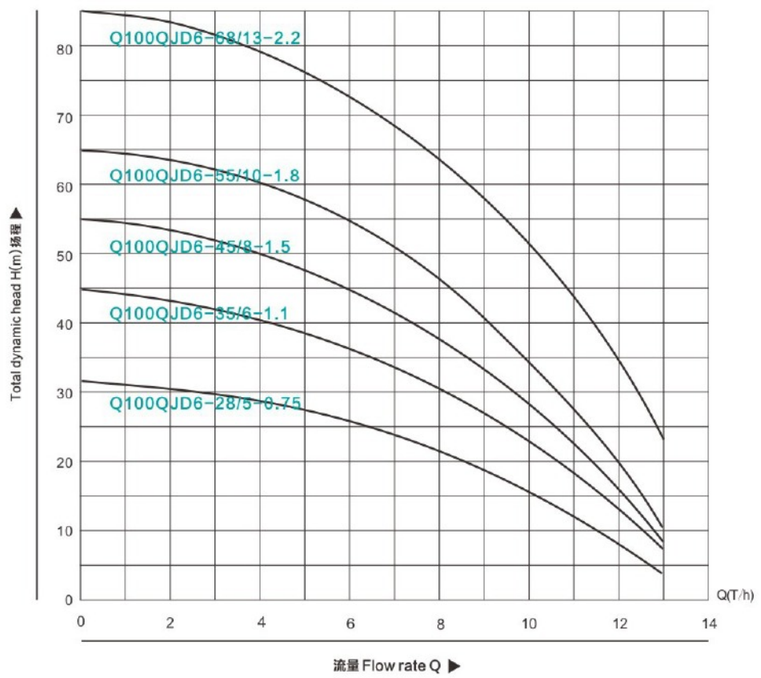

Q100JD-6T性能参数表 PERFORMANCE TABLE

型 号 Model	电 压(V) Voltage	功 率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	3	4	5	6	7	8	9
Q100QJD6-28/5-0.75	220/380	0.75	1.5"	100	扬程(m) Rang of lift	33	32	31	30	28	26	24	20
Q100QJD6-35/6-1.1	220/380	1.1	1.5"	100		45	42	39	37	35	33	30	26
Q100QJD6-45/8-1.5	220/380	1.5	1.5"	100		55	51	49	47	45	40	36	33
Q100QJD6-55/10-1.8	220/380	1.8	1.5"	100		65	62	60	57	55	49	45	40
Q100QJD6-68/13-2.2	220/380	2.2	1.5"	100		85	81	78	74	68	64	58	52

T100QJY

不锈钢井用潜水泵系列

stainless steel well submersible pump series

T100QJY系列特点

1.陶瓷抗沙结构，耐磨损，使用寿命长；
2.流量大，全扬程，全电压，适合家用，民用；（高性价比）
3.油浸式电机，可潜水深度120米，接插式电缆，容易更换；
4.水泵使用环境；常温清水；
5.电容内置，安装方便；
6.马达自动保护；
7.单相180V—230V/50Hz。

T100QJY Series features

1.Ceramic anti-sand structure, wear resistance, long service life;
2.Large flow, full head, full voltage, suitable for home and civilian(cost-effective/high performance ratio);
3. Oil-immersed motor, dive depth of 120 meters, plug-in cable, easy to replace;
4.Pump use environmet; room temperature, clear water;
5.Capacitor built-in, easy to install;
6.Motor automatic protection;
7.Single-phase 180V-230V/50Hz.

T100QJY系列型号示例

Series Products Model Example

T100 QJY D 3 - 163 /26 - 2.2

- 额定功率 Rated power
- 叶轮级数 Impeller progression
- 额定扬程 Rated lift
- 额定流量 Rated flow rate
- 单相（三相不标注） Single phase (three phase)
- 井用潜水电泵 Submersible pump for well
- 系列型号 Series number

T100QJY

不锈钢井用潜水泵系列

stainless steel well submersible pump series

T100QJY3

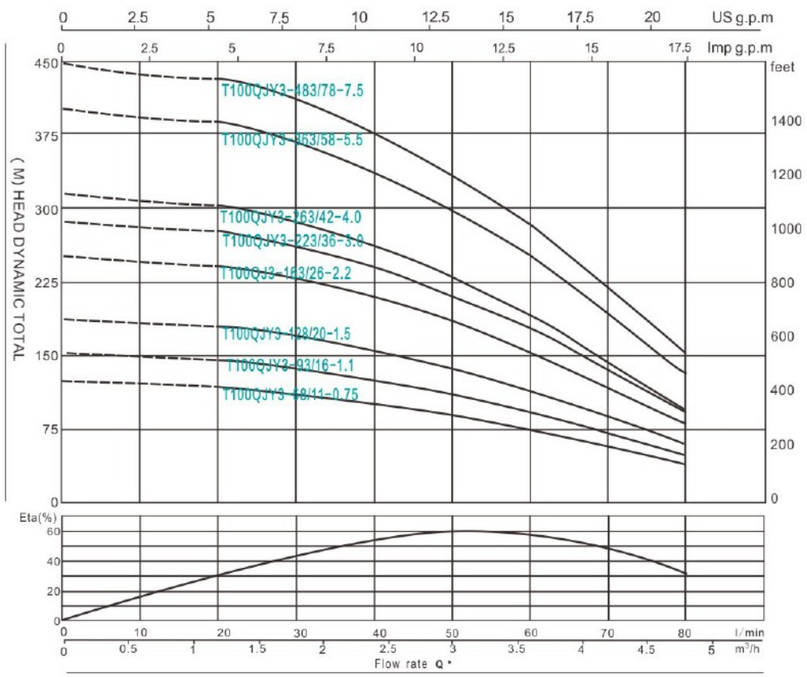

T100QJY3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	1	2	3	4	5
T100QJY3-68/11-0.75	T100QJY3-68/11-0.75	0.75	1	扬程(m) Rang of lift	83	80	78	68	58	37
T100QJY3-93/16-1.1	T100QJY3-93/16-1.1	1.1	1.5		120	117	114	93	85	54
T100QJY3-128/20-1.5	T100QJY3-128/20-1.5	1.5	2		150	146	142	128	106	68
T100QJ3-163/26-2.2	T100QJ3-163/26-2.2	2.2	3		195	190	185	163	138	88
	T100QJY3-223/36-3.0	3	4		270	263	256	223	191	122
	T100QJY3-263/42-4.0	4	5.5		315	307	298	263	223	143
	T100QJY3-363/58-5.5	5.5	7.5		435	423	412	363	307	197
	T100QJY3-483/78-7.5	7.5	10		585	569	554	483	413	265

T100QJY5

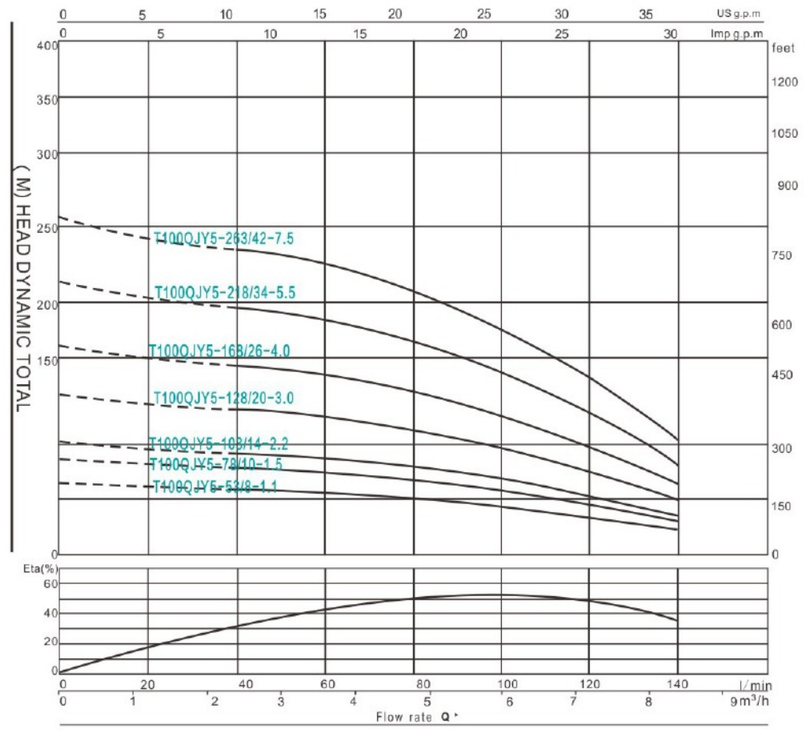

T100QJY5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery					n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	3	4	5	6	7	8
T100QJY5-53/8-1.1	T100QJY5-53/8-1.1	1.1	1.5	扬程(m) Rang of lift	63	61	59	53	48	41	33
T100QJY5-78/10-1.5	T100QJY5-78/10-1.5	1.5	2		79	76	74	78	67	60	48
T100QJY5-103/14-2.2	T100QJY5-103/14-2.2	2.2	3		111	106	104	103	93	78	60
	T100QJY5-128/20-3.0	3	4		146	139	135	128	115	98	73
	T100QJY5-168/26-4.0	4	5.5		193	188	181	168	153	128	99
	T100QJY5-218/34-5.5	5.5	7.5		253	243	233	218	198	165	123
	T100QJY5-263/42-7.5	7.5	10		313	293	278	263	233	201	153

T100QJY

不锈钢井用潜水泵系列

stainless steel well submersible pump series

T100QJY8

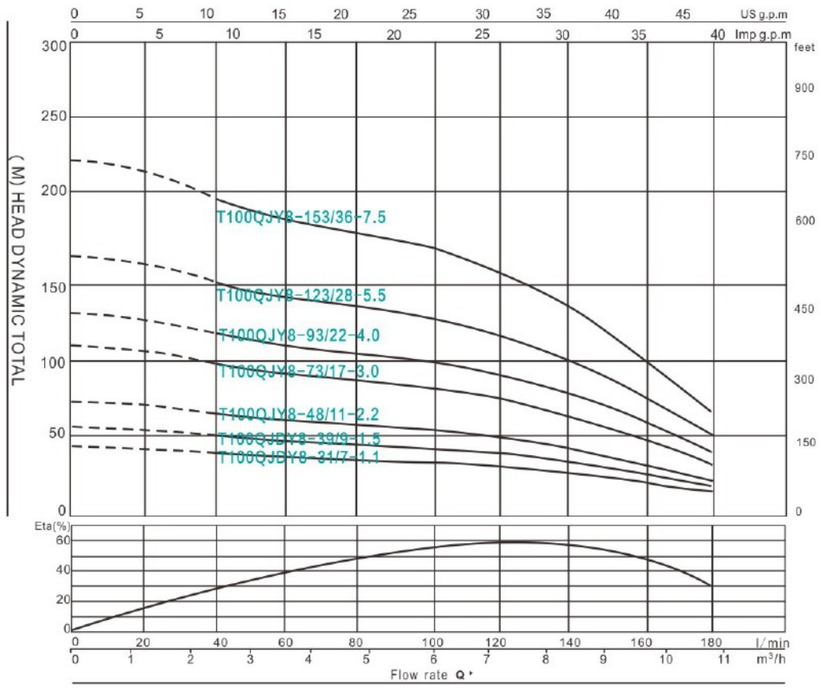

T100QJY10

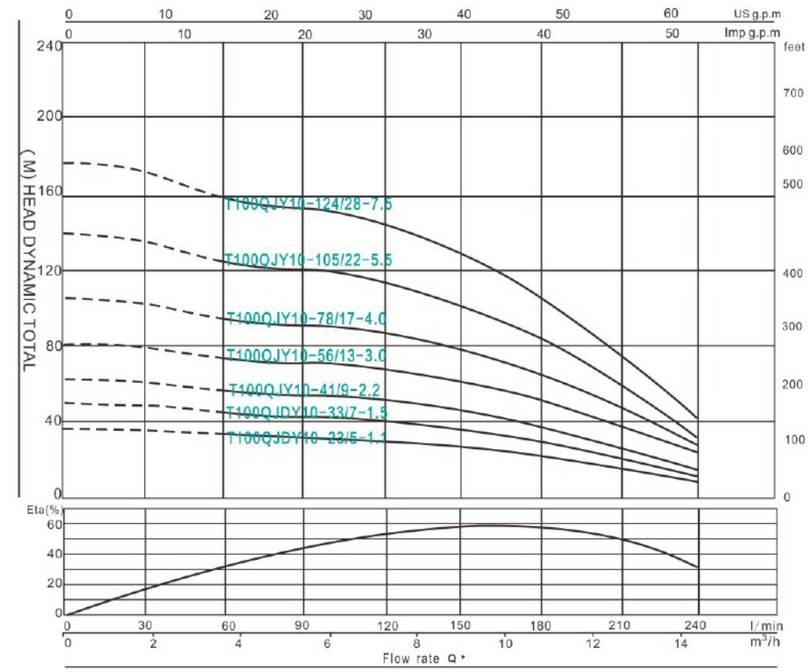

T100QJY8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min		
220V~240V	380V~415V	KW	HP	M³/H	0	6	7	8	9	10	12
T100QJDY8-31/7-1.1	T100QJDY8-31/7-1.1	1.1	1.5	扬程(m) Rang of lift	48	36	34	31	29	26	18
T100QJDY8-39/9-1.5	T100QJDY8-39/9-1.5	1.5	2		58	45	43	39	36	31	23
T100QJY8-48/11-2.2	T100QJY8-48/11-2.2	2.2	3		73	56	53	48	43	38	28
	T100QJY8-73/17-3.0	3	4		108	85	78	73	65	58	39
	T100QJY8-93/22-4.0	4	5.5		138	108	100	93	83	73	50
	T100QJY8-123/28-5.5	5.5	7.5		173	143	133	123	111	98	68
	T100QJY8-153/36-7.5	7.5	10		223	178	165	153	138	123	83

T100QJY10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min		
220V~240V	380V~415V	KW	HP	m³/h	0	4	6	8	10	12	14
T100QJDY10-23/5-1.1	T100QJDY10-23/5-1.1	1.1	1.5	扬程(m) Rang of lift	30	29	27	25	23	13	8
T100QJDY10-33/7-1.5	T100QJDY10-33/7-1.5	1.5	2		42	41	37	35	33	18	11
T100QJY10-41/9-2.2	T100QJY10-41/9-2.2	2.2	3		48	46	42	42	41	21	12
	T100QJY10-56/13-3.0	3	4		72	70	64	60	56	31	18
	T100QJY10-78/17-4.0	4	5.5		108	104	95	90	78	47	27
	T100QJY10-105/22-5.5	5.5	7.5		132	132	117	108	105	57	33
	T100QJY10-124/28-7.5	7.5	10		168	165	148	132	124	73	42

T100QJY

不锈钢井用潜水泵系列

stainless steel well submersible pump series

T100QJY16

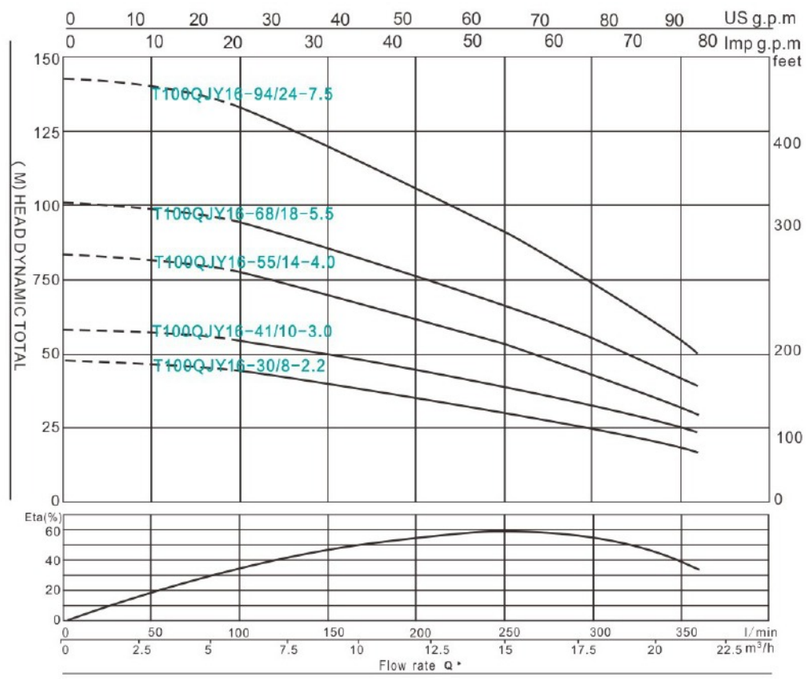

T100QJY16 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	9	12	16	18	21
T100QJY16-30/8-2.2	T100QJY16-30/8-2.2	2.2	3	扬程(m) Rang of lift	48	40	35	30	24	16
	T100QJY16-41/10-3.0	3	4		60	50	44	41	30	20
	T100QJY16-55/14-4.0	4	5.5		84	70	61	55	42	28
	T100QJY16-68/18-5.5	5.5	7.5		108	90	78	68	54	36
	T100QJY16-94/24-7.5	7.5	10		144	120	104	94	72	48

Q130QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Q130QJ系列特点

1.流量大，全扬程，全电压，适合农用，工业用；
2.油浸式电机，可潜水深度120米，
3.水泵使用环境；常温清水；
4.工程塑料叶轮，悬浮设计；
5.陶瓷抗沙结构耐磨损。

Q130QJ Series features

1.Large flow rate,full lift range,full voltage,suitable for household and commercial use;
2.Submersible motor that can dive to the depth of 120meters;easily replaced plug-in cable;
3.Pump use environment:room temperature,clear water;
4.Engineering plastic impeller of suspension design;
5.Ceramic anti-sand structure feature features wear resistanceand long life;

Q130QJ系列型号示例

Series Products Model Example

Q130 QJ D 8 - 68 /7 - 1.5

- 1.5 — 额定功率 Rated power
- /7 — 叶轮级数 Impeller progression
- 68 — 额定扬程 Rated lift
- 8 — 额定流量 Rated flow rate
- D — 单相（三相不标注）Single phase (three phase)
- QJ — 井用潜水电泵 Submersible pump for well
- Q130 — 系列型号 Series number

Q130QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Q130QJ-8T

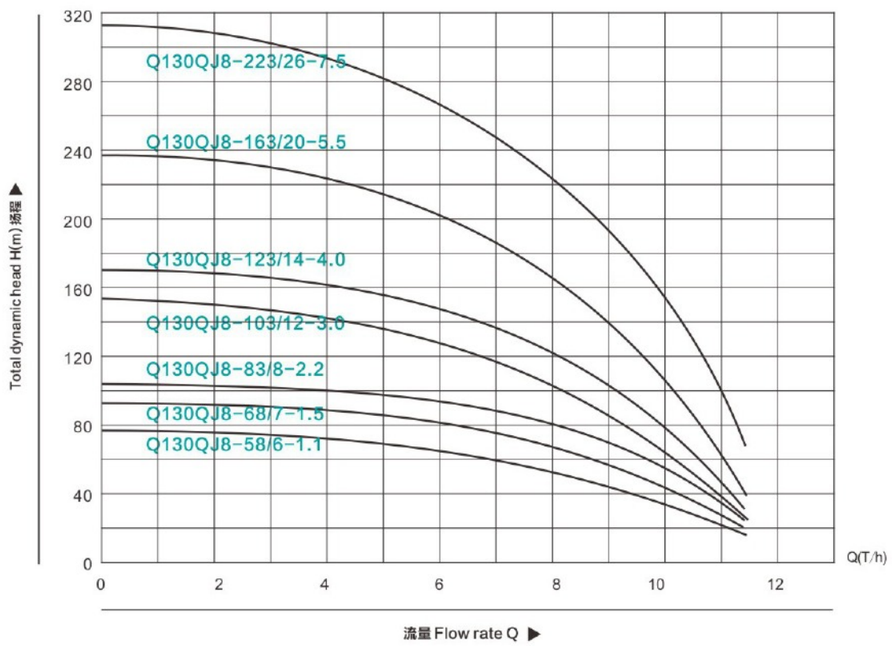

Q130JD-8T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	5	6	7	8	9	10
Q130QJ8-58/6-1.1	220/380	1.1	1.5"	127	扬程(m) Rang of lift	78	67	67	61	58	45	35
Q130QJ8-68/7-1.5	220/380	1.5	1.5"	127		93	85	82	75	68	58	43
Q130QJ8-83/8-2.2	220/380	2.2	1.5"	127		103	98	95	88	83	68	53
Q130QJ8-103/12-3.0	220/380	3	1.5"	127		153	133	127	114	103	88	63
Q130QJ8-123/14-4.0	380	4	1.5"	127		168	158	148	138	123	103	78
Q130QJ8-163/20-5.5	380	5.5	1.5"	127		239	213	198	174	163	138	103
Q130QJ8-223/26-7.5	380	7.5	1.5"	127		313	283	263	248	223	193	153
Q130QJ8-257/30-9.2	380	9.2	1.5"	127		361	326	303	286	257	222	176

Q130QJ-12T

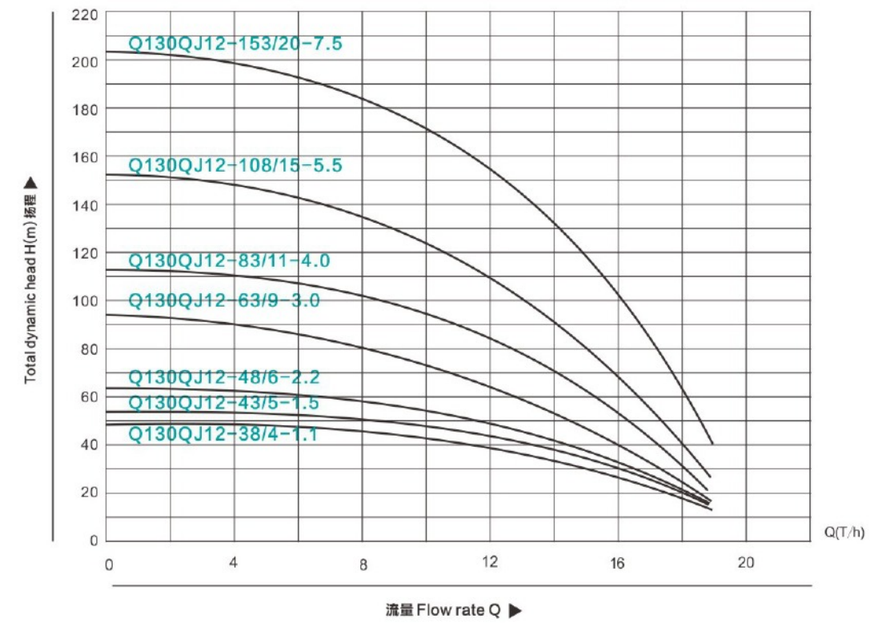

Q130JD-12T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	6	8	10	12	14	16
Q130QJ12-38/4-1.1	220/380	1.1	1.5"	127	扬程(m) Rang of lift	46	45	44	40	38	31	23
Q130QJ12-43/5-1.5	220/380	1.5	1.5"	127		53	50	49	45	43	38	28
Q130QJ12-48/6-2.2	220/380	2.2	1.5"	127		63	59	56	53	48	41	31
Q130QJ12-63/9-3.0	220/380	3	1.5"	127		93	85	78	70	63	51	38
Q130QJ12-83/11-4.0	380	4	1.5"	127		113	106	101	93	83	68	51
Q130QJ12-108/15-5.5	380	5.5	1.5"	127		153	141	133	121	108	88	65
Q130QJ12-153/20-7.5	380	7.5	1.5"	127		203	191	183	171	153	131	101
Q130QJ12-191/24-9.2	380	9.2	1.5"	127		248	235	225	210	188	150	141

3SD/3QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs

For domestic use, for civil and industrial applications

For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃

Maximum sand content: 0.25%

Maximum immersion: 80m

Maximum well diameter：3”

Motor and Pump

Rewindable motor

Singe phase: 220V-240V/50HZ

Three phase: 380V-415V/50HZ

Equip with start control box or digital auto-control box

Pumps are designed by casing stressed

Options on Request

Special mechanical seal

Other voltage or frequency 60HZ

Single phase motor with built-in capacitor

Series Products Model Example

3 SD (M) 1.8 /7

- 7 — impeller’s number
- 1.8 — capacity (m^3/h)
- (M) — single phase (three phase with no M marked)
- SD — series number
- 3 — well Ø3"

3SD1.8/3QJ1.8

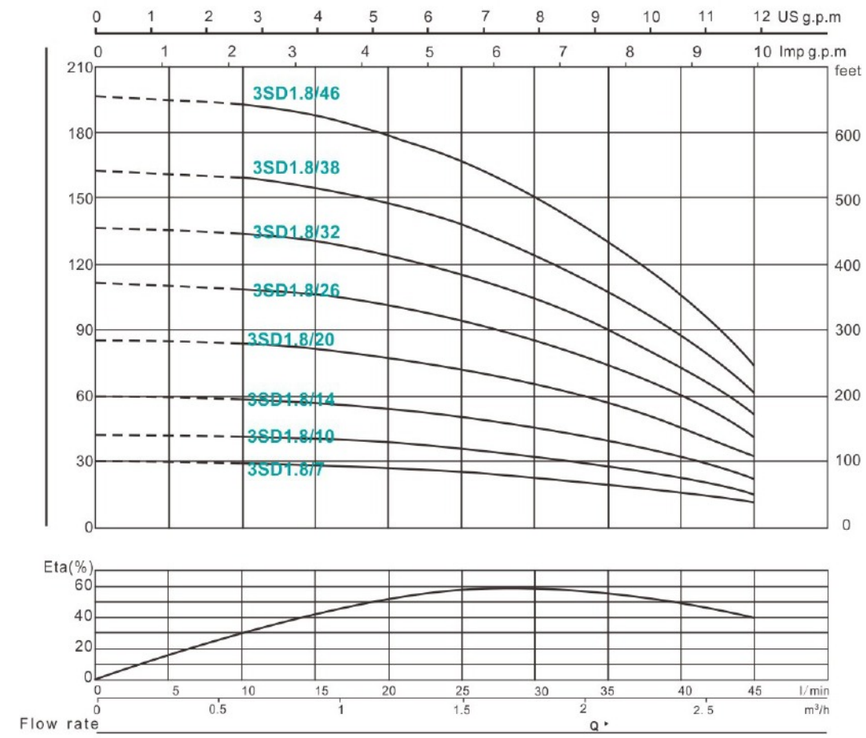

3SD(M)1.8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									n=2850r/min
220V~240V	380V~415V	KW	HP	M^3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7
				l/min	0	5	10	15	20	25	30	35	40	45
3SDM1.8/7	3SD1.8/7	0.18	0.25	扬程(m) Rang of lift	31		29	29	7	25	24	20.3	17	11.2
3SDM1.8/10	3SD1.8/10	0.25	0.33		44		41	41	10	35	34	29	24	16
3SDM1.8/14	3SD1.8/14	0.37	0.5		62		57	57	14	49	48	41	34	22.4
3SDM1.8/20	3SD1.8/20	0.55	0.75		88		82	80	20	70	68	58	48	32
3SDM1.8/26	3SD1.8/26	0.75	1		114		107	107	26	91	88	75	62	41.6
3SDM1.8/32	3SD1.8/32	1.1	1.5		141		131	129	32	112	109	93	77	51.2
3SDM1.8/38	3SD1.8/38	1.3	1.75		167		156	150	38	133	129	110	91	60.8
3SDM1.8/46	3SD1.8/46	1.5	2		202		190	185	46	161	156	133	110	73.6

3SD/3QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

3SD2.5/3QJ2.5

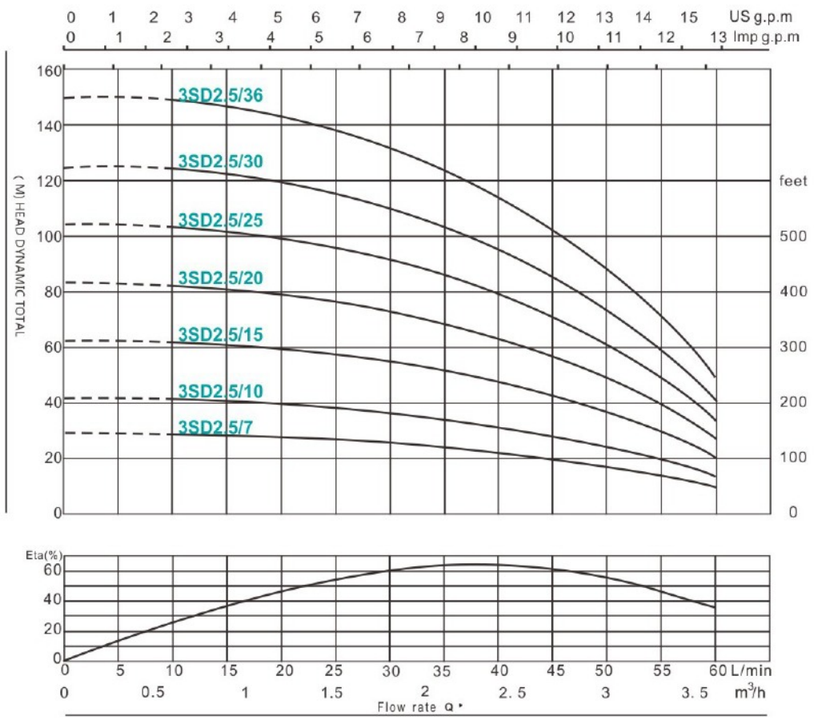

3SD3.5/3QJ3.5

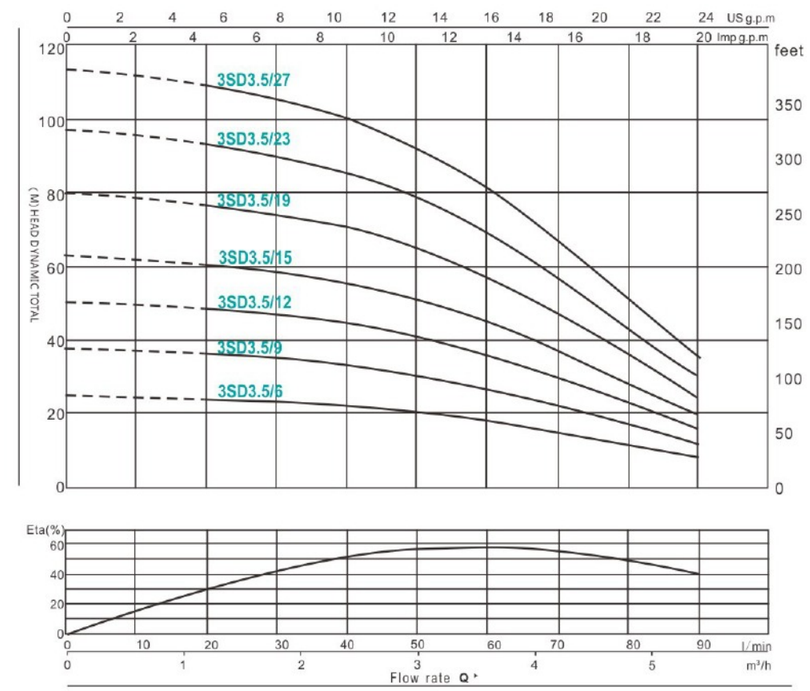

3SD(M)2.5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery					n=2850r/min				
220V~240V	380V~415V	KW	HP	M³/H	0	0.3	0.6	1.2	1.5	1.8	2.1	2.5	3	3.6
				l/min	0	5	10	20	25	30	35	40	50	60
3SDM2.5/7	3SD2.5/7	0.25	0.33	扬程(m) Rang of lift	30	29	29	28	28	27	25	22	22	13
3SDM2.5/10	3SD2.5/10	0.37	0.5		43	42	42	41	40	39	36	32	32	18
3SDM2.5/15	3SD2.5/15	0.55	0.75		60	63	62	61	60	59	54	45	45	27
3SDM2.5/20	3SD2.5/20	0.75	1		86	84	83	81	80	78	72	64	64	36
3SDM2.5/25	3SD2.5/25	1.1	1.5		112	105	104	101	100	98	90	83	83	45
3SDM2.5/30	3SD2.5/30	1.3	1.75		138	126	125	122	120	117	108	102	102	54
3SDM2.5/36	3SD2.5/36	1.5	2		163	151	149	146	144	140	130	122	122	64.8

3SD(M)3.5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery					n=2850r/min				
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.5	3	3.5	4.2	4.8	5.5
				l/min	0	10	10	20	25	30	35	40	50	60
3SDM3.5/6	3SD3.5/6	0.25	0.33	扬程(m) Rang of lift	26	25	24	23	22	20	18	17	12	8
3SDM3.5/9	3SD3.5/9	0.37	0.5		39	38	36	35	32	31	27	25	18	13
3SDM3.5/12	3SD3.5/12	0.55	0.75		52	50	48	47	43	41	36	34	24	17
3SDM3.5/15	3SD3.5/15	0.75	1		65	63	60	59	54	51	45	42	30	21
3SDM3.5/19	3SD3.5/19	1.1	1.5		82	80	76	74	68	65	57	53	38	27
3SDM3.5/23	3SD3.5/23	1.3	1.75		99	97	92	90	83	78	69	64	46	32
3SDM3.5/27	3SD3.5/27	1.5	2		116	113	108	105	97	92	81	76	54	38

3.5SD/3.5QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs

For domestic use, for civil and industrial applications

For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃

Maximum sand content: 0.25%

Maximum immersion: 80m

Maximum well diameter：3.5"

Motor and Pump

Rewindable motor

Singe phase: 220V-240V/50HZ

Three phase: 380V-415V/50HZ

Equip with start control box or digital auto-control box

Pumps are designed by casing stressed

Options on Request

Special mechanical seal

Other voltage or frequency 60HZ

Single phase motor with built-in capacitor

Series Products Model Example

3.5 SD (M) 2 / 8

- impeller' s number
- capacity (m^3/h)
- single phase (three phase with no M marked)
- series number
- well Ø3.5"

3.5SD2/3.5QJ2

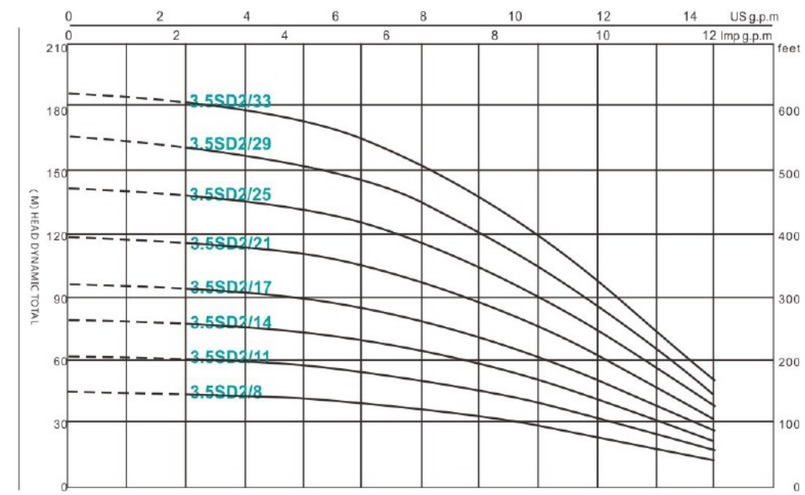

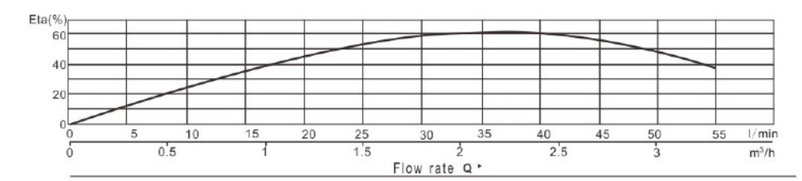

3.5SD(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery											n=2850r/min
220V~240V	380V~415V	KW	HP	M^3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3
				l/min	0	5	10	15	20	25	30	35	40	45	50	55
3.5SDM2/8	3.5SD2/8	0.25	0.33	扬程(m) Rang of lift	45	44	43	42	40	38	37	33.6	30	24	18	12
3.5SDM2/11	3.5SD2/11	0.37	0.5		62	61	59	58	55	52	51	46	41	33	25	17
3.5SDM2/14	3.5SD2/14	0.55	0.75		78	77	76	74	70	66	64	59	52	42	32	21
3.5SDM2/17	3.5SD2/17	0.75	1		95	94	92	90	85	80	78	71	63	51	39	26
3.5SDM2/21	3.5SD2/21	1.1	1.5		118	116	113	111	105	99	97	88	78	63	48	32
3.5SDM2/25	3.5SD2/25	1.3	1.75		140	138	135	133	125	118	115	105	93	75	58	38
3.5SDM2/29	3.5SD2/29	1.5	2		162	160	157	154	145	136	133	122	107	87	67	44
3.5SDM2/33	3.5SD2/33	1.8	2.5		185	182	178	175	165	155	152	139	122	99	76	50

3.5SD/3.5QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

3.5SD3/3.5QJ3

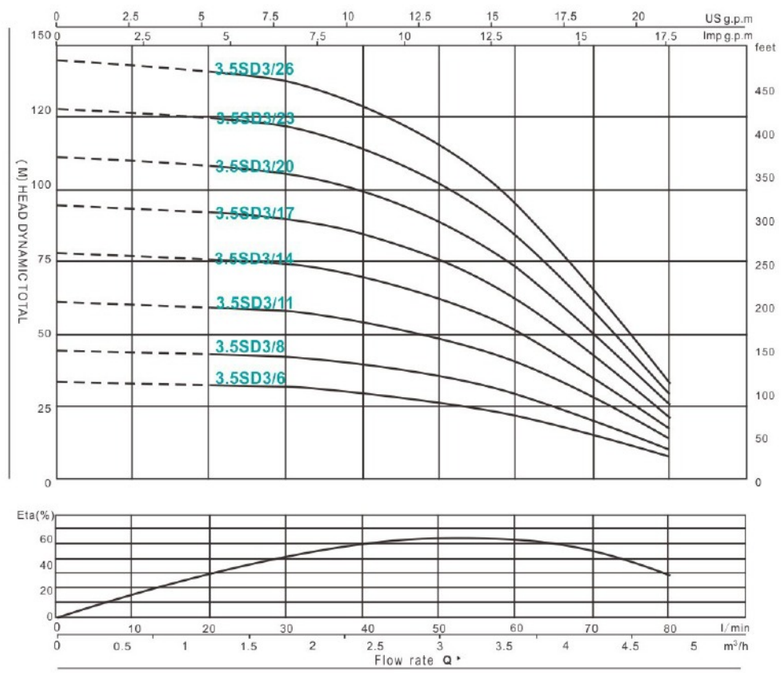

3.5SD(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min									
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.2	4.8
				l/min	0	10	20	30	40	50	60	70	70	80
3.5SDM3/6	3.5SD3/6	0.25	0.33	扬程(m) Rang of lift	34	33	32	32	30	29	22	15	15	9
3.5SDM3/8	3.5SD3/8	0.37	0.5		45	44	43	42	40	38	30	20	20	12
3.5SDM3/11	3.5SD3/11	0.55	0.75		62	61	59	58	55	53	41	28	28	17
3.5SDM3/14	3.5SD3/14	0.75	1		78	77	76	74	70	67	52	35	35	21
3.5SDM3/17	3.5SD3/17	1.1	1.5		95	94	92	90	85	82	63	43	43	26
3.5SDM3/20	3.5SD3/20	1.3	1.75		112	110	108	106	100	96	74	50	50	30
3.5SDM3/23	3.5SD3/23	1.5	2		129	127	124	122	115	110	85	58	58	35
3.5SDM3/26	3.5SD3/26	1.8	2.5		146	144	142	138	128	125	96	66	66	37

3.5SD4/3.5QJ4

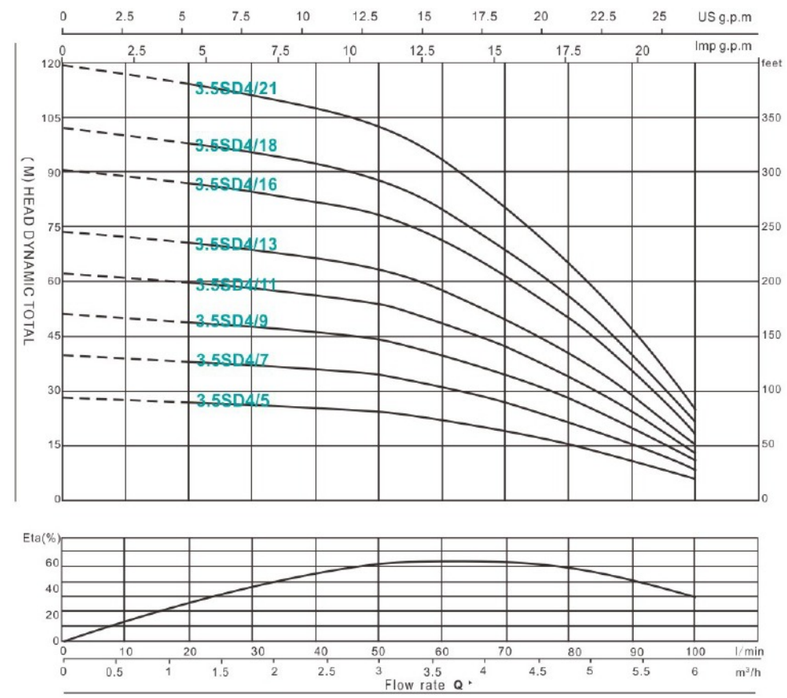

3.5SD(M)4 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min										
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.5	6
				l/min	0	10	20	30	40	50	60	70	80	90	100
3.5SDM4/5	3.5SD4/5	0.25	0.33	扬程(m) Rang of lift	29	28	27	26	25	25	23	19	15	12.5	6
3.5SDM4/7	3.5SD4/7	0.37	0.5		41	39	38	36	35	34	32	27	21	17.5	8
3.5SDM4/9	3.5SD4/9	0.55	0.75		52	50	49	47	45	44	41	34	27	22.5	11
3.5SDM4/11	3.5SD4/11	0.75	1		64	61	59	57	55	54	50	42	33	27.5	13
3.5SDM4/13	3.5SD4/13	1.1	1.5		75	72	70	68	65	64	59	49	39	32.5	16
3.5SDM4/16	3.5SD4/16	1.3	1.75		93	88	86	83	80	78	72	61	48	40	19
3.5SDM4/18	3.5SD4/18	1.5	2		104	99	97	94	90	88	81	68	54	45	22
3.5SDM4/21	3.5SD4/21	1.8	2.5		122	116	113	109	105	103	95	79.8	63	52.5	25

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

A B

Applications

For water supply from wells or reservoirs

For domestic use, for civil and industrial applications

For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃

Maximum sand content: 0.25%

Maximum immersion: 80m

Minimum well diameter: 4"

Motor and Pump

Rewindable motor

Singe phase: 220V-240V/50HZ

Three phase: 380V-415V/50HZ

Equip with start control box or digital auto-control box

Options on Request

Special mechanical seal

Other voltage or frequency 60HZ

Single phase motor with built-in capacitor

Series Products Model Example

4 SD (M) 2 / 8

- 8 — impeller's number
- 2 — capacity (m^3/h)
- (M) — single phase (three phase with no M marked)
- SD — series number
- 4 — well Ø4"

4SD2

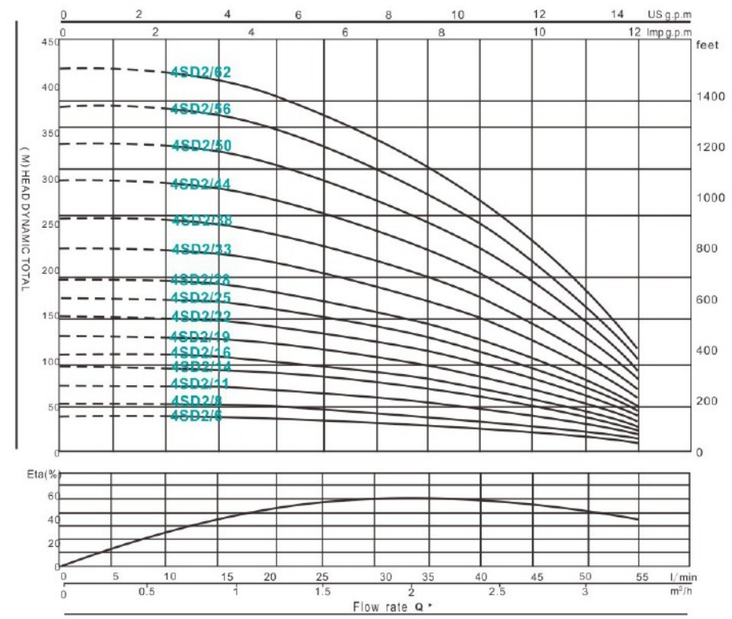

4SD(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery											n=2850r/min
220V~240V	380V~415V	KW	HP	M^3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3
				l/min	0	5	10	15	20	25	30	35	40	45	50	55
4SDM2/6	4SD2/6	0.25	0.33	扬程(m) Rang of lift	42	42	41	41	40	37	35	33	29	24	18	11
4SDM2/8	4SD2/8	0.37	0.5		56	56	55	54	54	50	47	44	38	32	24	15
4SDM2/11	4SD2/11	0.55	0.75		77	76	76	75	74	68	65	61	53	44	33	21
4SDM2/14	4SD2/14	0.75	1		98	97	97	95	94	87	83	77	67	56	42	27
4SDM2/16	4SD2/16	0.92	1.25		112	111	110	109	107	99	94	88	77	64	48	30
4SDM2/19	4SD2/19	1.1	1.5		133	132	131	129	127	118	112	105	91	76	57	36
4SDM2/22	4SD2/22	1.3	1.75		154	153	152	150	147	136	130	121	106	88	66	42
4SDM2/25	4SD2/25	1.5	2		175	174	173	170	168	155	148	138	120	100	75	48
4SDM2/28	4SD2/28	1.8	2.5		196	195	193	190	188	174	165	154	134	112	84	53
4SDM2/33	4SD2/33	2.2	3		231	229	228	224	221	205	195	181.5	158	132	99	63
4SDM2/38	4SD2/38	2.2	3		266	264	262	258	255	236	224	209	182	152	114	72
	4SD2/44	3	4		308	306	304	299	295	273	260	242	211	176	132	84
	4SD2/50	3	4		350	348	345	340	335	310	295	275	240	200	150	95
	4SD2/56	4	5.5		392	389	386	381	375	347	330	308	269	224	168	106
	4SD2/62	4	5.5		434	431	428	422	415	384	366	341	298	248	186	118

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SD3

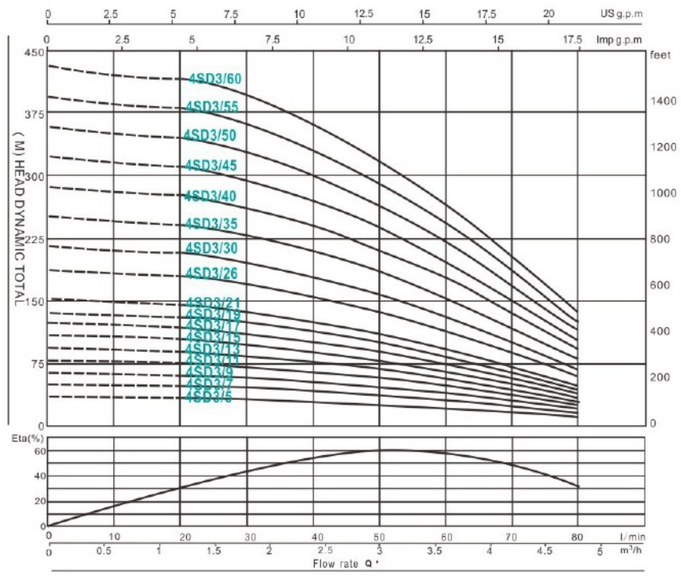

4SD4

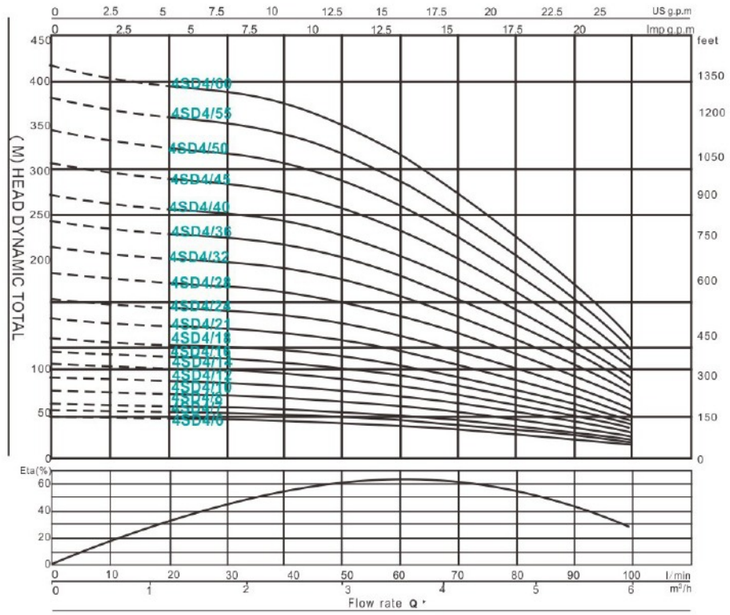

4SD(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery								n=2850r/min
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8
				l/min	0	10	20	30	40	50	60	70	80
4SDM3/5	4SD3/5	0.25	0.33	扬程(m) Rang of lift	35	35	35	33	30	28	22	17	11
4SDM3/7	4SD3/7	0.37	0.5		49	49	48	46	42	39	31	24	15
4SDM3/9	4SD3/9	0.55	0.75		63	63	62	59	54	50	40	31	20
4SDM3/11	4SD3/11	0.75	1		77	77	76	72	66	61	48	37	24
4SDM3/13	4SD3/13	0.92	1.25		91	91	90	85	78	72	57	44	29
4SDM3/15	4SD3/15	1.1	1.5		105	105	104	98	90	83	66	51	33
4SDM3/17	4SD3/17	1.3	1.75		119	119	117	111	102	94	75	58	37
4SDM3/19	4SD3/19	1.5	2		133	133	131	124	114	105	84	65	42
4SDM3/21	4SD3/21	1.8	2.5		147	147	145	137	126	110	92	71.4	46
4SDM3/26	4SD3/26	2.2	3		182	182	179	169	156	140	114	88.4	57
4SDM3/30	4SD3/30	2.2	3		210	210	207	195	180	160	132	102	66
	4SD3/35	3	4		245	245	242	228	210	190	154	119	77
	4SD3/40	3	4		280	280	276	260	240	220	176	136	88
	4SD3/45	4	5.5		315	315	311	293	270	240	198	153	99
	4SD3/50	4	5.5		350	350	345	325	300	270	220	170	110
	4SD3/55	5.5	7.5		385	385	379.5	357.5	330	300	242	187	121
	4SD3/60	5.5	7.5		420	420	414	390	360	320	264	204	132

4SD(M)4 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery								n=2850r/min
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	6
				l/min	0	10	20	30	40	50	60	70	80	90	100
4SDM4/6	4SD4/6	0.37	0.5	扬程(m) Rang of lift	45	42	41	40	39	36	33	30	24	19	14
4SDM4/7	4SD4/7	0.55	0.75		53	49	48	46	46	42	39	35	28	22	17
4SDM4/8	4SD4/8	0.75	1		60	56	54	53	52	48	44	40	32	26	19
4SDM4/10	4SD4/10	0.92	1.25		75	70	68	66	65	60	55	50	40	32	24
4SDM4/12	4SD4/12	1.1	1.5		90	84	82	79	78	72	66	60	48	38	29
4SDM4/14	4SD4/14	1.3	1.75		105	98	95	92	91	84	77	70	56	45	34
4SDM4/16	4SD4/16	1.5	2		120	112	109	106	104	96	88	80	64	51	38
4SDM4/18	4SD4/18	1.8	2.5		135	126	122	119	117	108	99	90	72	58	43
4SDM4/21	4SD4/21	2.2	3		157.5	147	143	139	137	126	116	105	84	67	50
4SDM4/24	4SD4/24	2.2	3		180	168	163	158	156	144	132	120	96	77	58
	4SD4/28	3	4		210	196	190	185	182	168	154	140	112	90	67
	4SD4/32	3	4		240	224	218	211	208	192	176	160	128	102	77
	4SD4/36	4	5.5		270	252	245	238	234	216	198	180	144	115	86
	4SD4/40	4	5.5		300	280	272	264	260	240	220	200	160	128	96
	4SD4/45	5.5	7.5		337.5	315	306	297	293	270	248	225	180	144	108
	4SD4/50	5.5	7.5		375	350	340	330	325	300	275	250	200	160	120
	4SD4/55	7.5	10		412.5	385	374	363	357.5	330	302.5	275	220	176	132
	4SD4/60	7.5	10		450	420	408	396	390	360	330	300	240	192	144

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SD6

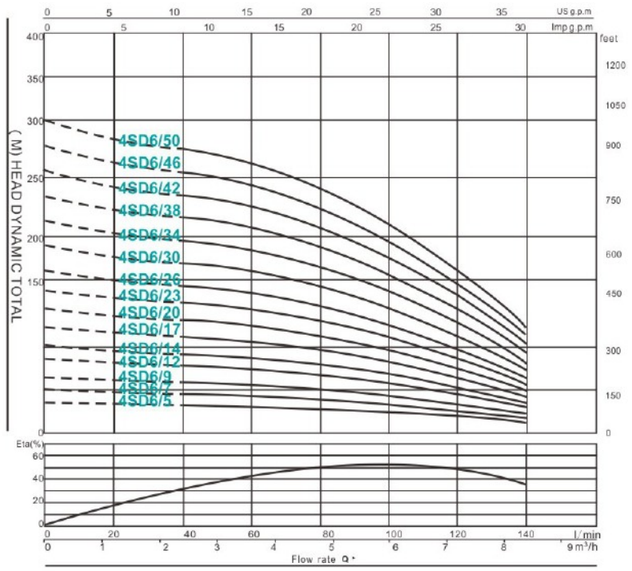

4SD8

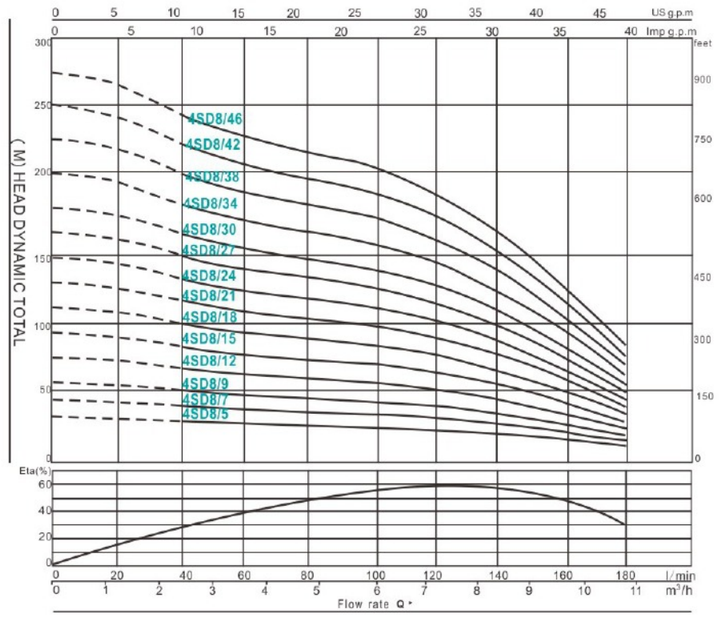

4SD(M)6 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery							n=2850r/min
220V~240V	380V~415V	KW	HP	M^3/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5
				l/min	0	20	40	60	80	100	120	140
4SDM6/5	4SD6/5	0.37	0.5	扬程(m) Rang of lift	35	34	33	31	28	24	20	13
4SDM6/6	4SD6/6	0.55	0.75		42	40	39	37	34	28	24	15
4SDM6/7	4SD6/7	0.75	1		49	47	46	43	39	33	28	18
4SDM6/8	4SD6/8	0.92	1.25		56	54	52	49	45	38	32	20
4SDM6/9	4SD6/9	1.1	1.5		63	60	59	55	50	42	36	23
4SDM6/11	4SD6/11	1.3	1.75		77	74	72	67	62	52	44	28
4SDM6/12	4SD6/12	1.5	2		84	80	78	73	67	56	48	30
4SDM6/14	4SD6/14	1.8	2.5		98	94	91	85	78	66	56	35
4SDM6/17	4SD6/17	2.2	3		119	114	111	104	95	80	68	43
4SDM6/20	4SD6/20	2.2	3		140	134	130	122	112	94	80	50
	4SD6/23	3	4		161	154	150	140	129	108	92	58
	4SD6/26	3	4		182	174	169	159	146	122	104	65
	4SD6/30	4	5.5		210	201	195	183	168	141	120	75
	4SD6/34	4	5.5		238	228	221	207	190	160	136	85
	4SD6/38	5.5	7.5		266	255	247	232	213	179	152	95
	4SD6/42	5.5	7.5		294	281	273	256	235	197	168	105
	4SD6/46	7.5	10		322	308	299	281	258	216	184	115
	4SD6/50	7.5	10		350	335	325	305	280	235	200	125

4SD(M)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									n=2850r/min
220V~240V	380V~415V	KW	HP	M^3/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5	9.6	11
				l/min	0	20	40	60	80	100	120	140	160	180
4SDM8/5	4SD8/5	0.55	0.75	扬程(m) Rang of lift	31	31	28	26	25	24	22	18	14	9
4SDM8/6	4SD8/6	0.75	1		37	37	34	31	30	29	26	21	17	10.8
4SDM8/7	4SD8/7	0.92	1.25		43	43	39	36	35	34	31	25	20	12.6
4SDM8/8	4SD8/8	1.1	1.5		50	50	45	42	40	38	35	28	22	14.4
4SDM8/9	4SD8/9	1.3	1.75		56	56	50	47	45	43	40	32	25	16.2
4SDM8/10	4SD8/10	1.5	2		62	62	56	52	50	48	44	35	28	18
4SDM8/12	4SD8/12	1.8	2.5		74	74	67	62	60	58	53	42	34	21.6
4SDM8/15	4SD8/15	2.2	3		93	93	84	78	75	72	66	53	42	27
4SDM8/18	4SD8/18	2.2	3		111.6	112	101	94	90	86	79	63	50	32.4
	4SD8/21	3	4		130.2	130	118	109	105	101	92	74	59	37.8
	4SD8/24	3	4		148.8	149	134	125	120	115	106	84	67	43.2
	4SD8/27	4	5.5		167.4	167	151	140	135	130	119	95	76	48.6
	4SD8/30	4	5.5		186	186	168	156	150	144	132	105	84	54
	4SD8/34	5.5	7.5		210.8	211	190	177	170	163	150	119	95	61.2
	4SD8/38	5.5	7.5		235.6	236	213	198	190	182	167	133	106	68.4
	4SD8/42	7.5	10		260.4	260	235	218	210	202	185	147	118	75.6
	4SD8/46	7.5	10		285.2	285	258	239	230	221	202	161	129	82.8

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SD10

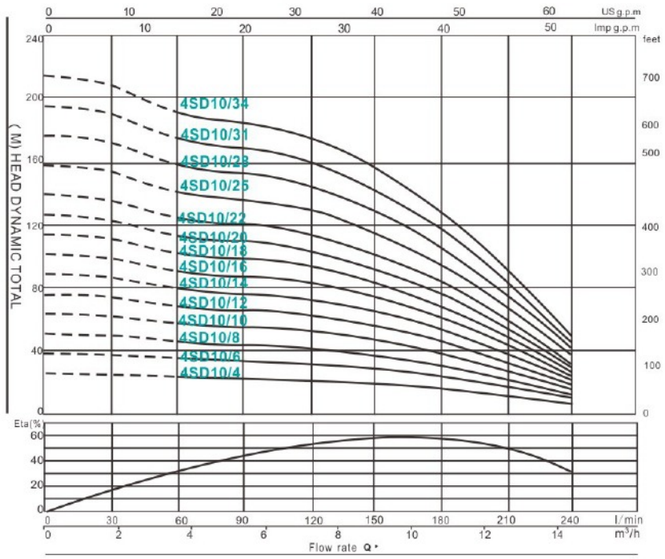

4SD(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min								
220V~240V	380V~415V	KW	HP	M³/H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4
				l/min	0	30	60	90	120	150	180	210	240
4SDM10/4	4SD10/4	0.75	1	扬程(m) Rang of lift	24	24	23	21	20	18	15	10	6
4SDM10/5	4SD10/5	0.92	1.25		30	30	29	27	25	23	19	13	8
4SDM10/6	4SD10/6	1.1	1.5		36	36	35	32	30	27	23	16	9
4SDM10/7	4SD10/7	1.3	1.75		42	42	41	37	35	32	27	18	11
4SDM10/8	4SD10/8	1.5	2		48	48	46	42	40	36	30	21	12
4SDM10/10	4SD10/10	1.8	2.5		60	60	58	53	50	45	38	26	15
4SDM10/12	4SD10/12	2.2	3		72	72	70	64	60	54	46	31	18
4SDM10/14	4SD10/14	2.2	3		84	84	81	74	70	63	53	36	21
	4SD10/16	3	4		96	96	93	85	80	72	61	42	24
	4SD10/18	3	4		108	108	104	95	90	81	68	47	27
	4SD10/20	4	5.5		120	120	116	106	100	90	76	52	30
	4SD10/22	4	5.5		132	132	128	117	110	99	84	57	33
	4SD10/25	5.5	7.5		150	150	145	133	125	113	95	65	38
	4SD10/28	5.5	7.5		168	168	162	148	140	126	106	73	42
	4SD10/31	7.5	10		186	186	180	164	155	140	118	81	47
	4SD10/34	7.5	10		204	204	197	180	170	153	129	88	51

4SD12

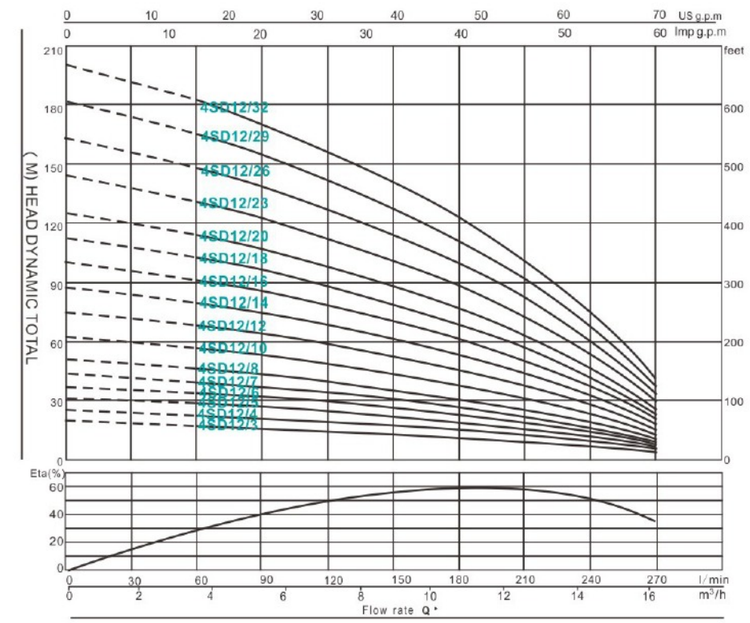

4SD(M)12 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min									
220V~240V	380V~415V	KW	HP	M³/H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16
				l/min	0	30	60	90	120	150	180	210	240	270
4SDM12/3	4SD12/3	0.75	1	扬程(m) Rang of lift	19	18	17	16	15	13	12	9	7	4.5
4SDM12/4	4SD12/4	0.92	1.25		25	24	22	21	20	17	16	12	9	6
4SDM12/5	4SD12/5	1.1	1.5		32	30	28	27	25	22	20	15	12	7.5
4SDM12/6	4SD12/6	1.3	1.75		38	36	33	32	30	26	24	18	14	9
4SDM12/7	4SD12/7	1.5	2		44	42	39	37	35	30	28	21	16	10.5
4SDM12/8	4SD12/8	1.8	2.5		50	48	44	42	40	34	32	24	18	12
4SDM12/10	4SD12/10	2.2	3		63	60	55	53	50	43	40	30	23	15
4SDM12/12	4SD12/12	2.2	3		76	72	66	64	60	52	48	36	28	18
	4SD12/14	3	4		88.2	84	77	74	70	60	56	42	32	21
	4SD12/16	3	4		100.8	96	88	85	80	69	64	48	37	24
	4SD12/18	4	5.5		113.4	108	99	95	90	77	72	54	41	27
	4SD12/20	4	5.5		126	120	110	106	100	86	80	60	46	30
	4SD12/23	5.5	7.5		144.9	138	127	122	115	99	92	69	53	34.5
	4SD12/26	5.5	7.5		163.8	156	143	138	130	112	104	78	60	39
	4SD12/29	7.5	10		182.7	174	160	154	145	125	116	87	67	43.5
	4SD12/32	7.5	10		201.6	192	176	170	160	138	128	96	74	48

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SD16

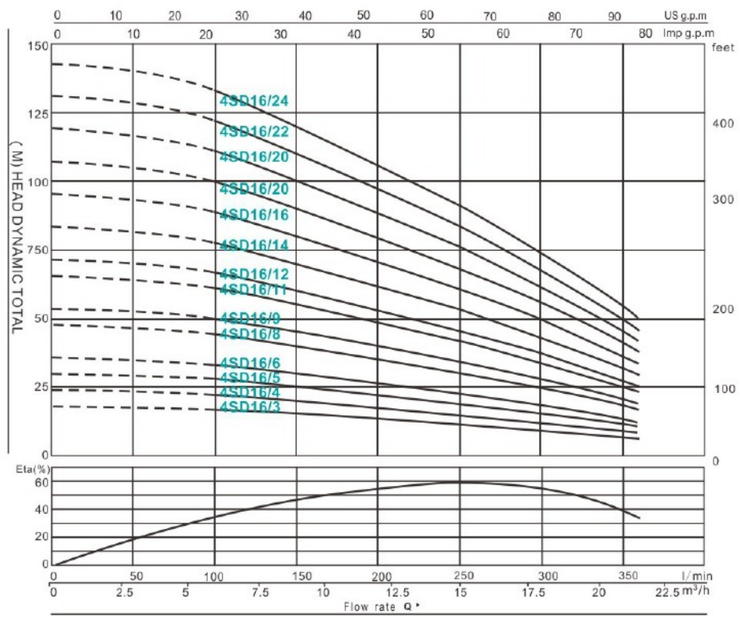

4SD(M)16 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min			
220V~240V	380V~415V	KW	HP	M³/H	0	3	6	9	12	15	18	21
				l/min	0	50	100	150	200	250	300	350
4SDM16/3	4SD16/3	1.1	1.5	扬程(m) Rang of lift	18	17	17	15	13	11	9	6
4SDM16/4	4SD16/4	1.3	1.75		24	23	22	20	17	15	12	8
4SDM16/5	4SD16/5	1.5	2		30	29	28	25	22	19	15	10
4SDM16/6	4SD16/6	1.8	2.5		36	35	33	30	26	23	18	12
4SDM16/8	4SD16/8	2.2	3		48	46	44	40	35	30	24	16
4SDM16/9	4SD16/9	2.2	3		54	52	50	45	39	34	27	18
	4SD16/11	3	4		66	64	61	55	48	42	33	22
	4SD16/12	3	4		72	70	66	60	52	45	36	24
	4SD16/14	4	5.5		84	81	77	70	61	53	42	28
	4SD16/16	4	5.5		96	93	88	80	70	61	48	32
	4SD16/18	5.5	7.5		108	104	99	90	78	68	54	36
	4SD16/20	5.5	7.5		120	116	110	100	87	76	60	40
	4SD16/22	7.5	10		132	128	121	110	96	83	66	44
	4SD16/24	7.5	10		144	139	132	120	104	91	72	48

4SS/4SN

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs

For domestic use, for civil and industrial applications

For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃

Maximum sand content: 0.25%

Maximum immersion: 80m

Minimum well diameter: 4"

Motor and Pump

Rewindable motor

Singe phase: 220V-240V/50HZ

Three phase: 380V-415V/50HZ

Equip with start control box or digital auto-control box

Options on Request

Special mechanical seal

Other voltage or frequency 60HZ

Single phase motor with built-in capacitor

Series Products Model Example

4 SS (M) 2 / 6

- impeller's number
- capacity (m³/h)
- single phase (three phase with no M marked)
- series number
- well Ø4"

4SS/4SN

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SS2/4SN2

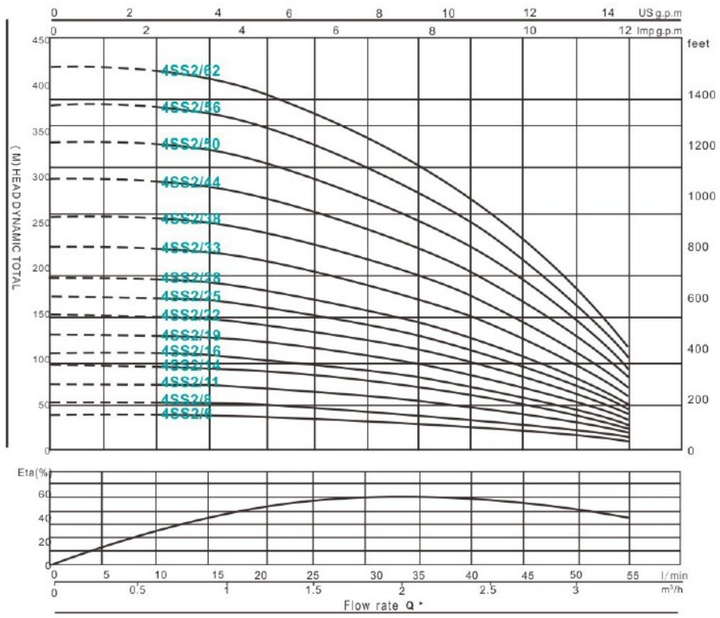

4SS(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min											
220V~240V	380V~415V	KW	HP	M^3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3
				l/min	0	5	10	15	20	25	30	35	40	45	50	55
4SSM2/6	4SS2/6	0.25	0.33	扬程(m) Rang of lift	42	42	41	41	40	37	35	33	29	24	18	11
4SSM2/8	4SS2/8	0.37	0.5		56	56	55	54	54	50	47	44	38	32	24	15
4SSM2/11	4SS2/11	0.55	0.75		77	76	76	75	74	68	65	61	53	44	33	21
4SSM2/14	4SS2/14	0.75	1		98	97	97	95	94	87	83	77	67	56	42	27
4SSM2/16	4SS2/16	0.92	1.25		112	111	110	109	107	99	94	88	77	64	48	30
4SSM2/19	4SS2/19	1.1	1.5		133	132	131	129	127	118	112	105	91	76	57	36
4SSM2/22	4SS2/22	1.3	1.75		154	153	152	150	147	136	130	121	106	88	66	42
4SSM2/25	4SS2/25	1.5	2		175	174	173	170	168	155	148	138	120	100	75	48
4SSM2/28	4SS2/28	1.8	2.5		196	195	193	190	188	174	165	154	134	112	84	53
4SSM2/33	4SS2/33	2.2	3		231	229	228	224	221	205	195	181.5	158	132	99	63
4SSM2/38	4SS2/38	2.2	3		266	264	262	258	255	236	224	209	182	152	114	72
	4SS2/44	3	4		308	306	304	299	295	273	260	242	211	176	132	84
	4SS2/50	3	4		350	348	345	340	335	310	295	275	240	200	150	95
	4SS2/56	4	5.5		392	389	386	381	375	347	330	308	269	224	168	106
	4SS2/62	4	5.5		434	431	428	422	415	384	366	341	298	248	186	118

4SS3/4SN3

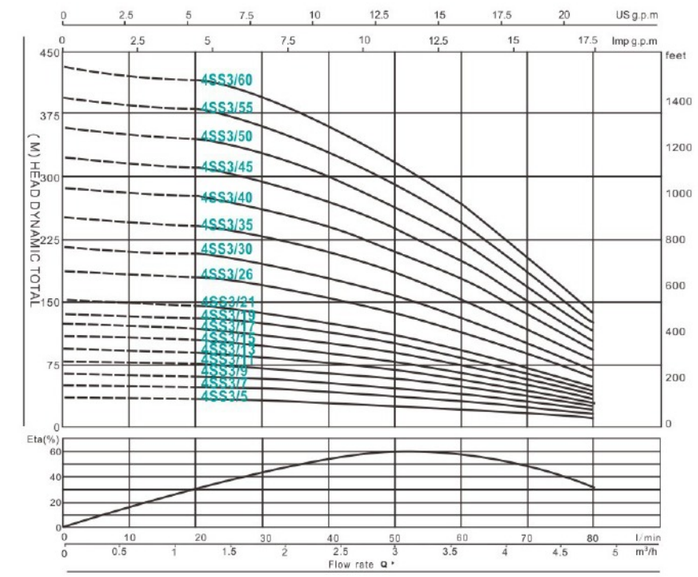

4SS(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min								
220V~240V	380V~415V	KW	HP	M^3/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8
				l/min	0	10	20	30	40	50	60	70	80
4SSM3/5	4SS3/5	0.25	0.33	扬程(m) Rang of lift	35	35	35	33	30	28	22	17	11
4SSM3/7	4SS3/7	0.37	0.5		49	49	48	46	42	39	31	24	15
4SSM3/9	4SS3/9	0.55	0.75		63	63	62	59	54	50	40	31	20
4SSM3/11	4SS3/11	0.75	1		77	77	76	72	66	61	48	37	24
4SSM3/13	4SS3/13	0.92	1.25		91	91	90	85	78	72	57	44	29
4SSM3/15	4SS3/15	1.1	1.5		105	105	104	98	90	83	66	51	33
4SSM3/17	4SS3/17	1.3	1.75		119	119	117	111	102	94	75	58	37
4SSM3/19	4SS3/19	1.5	2		133	133	131	124	114	105	84	65	42
4SSM3/21	4SS3/21	1.8	2.5		147	147	145	137	126	110	92	71.4	46
4SSM3/26	4SS3/26	2.2	3		182	182	179	169	156	140	114	88.4	57
4SSM3/30	4SS3/30	2.2	3		210	210	207	195	180	160	132	102	66
	4SS3/35	3	4		245	245	242	228	210	190	154	119	77
	4SS3/40	3	4		280	280	276	260	240	220	176	136	88
	4SS3/45	4	5.5		315	315	311	293	270	240	198	153	99
	4SS3/50	4	5.5		350	350	345	325	300	270	220	170	110
	4SS3/55	5.5	7.5		385	385	379.5	357.5	330	300	242	187	121
	4SS3/60	5.5	7.5		420	420	414	390	360	320	264	204	132

4SS/4SN

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SS4/4SN4

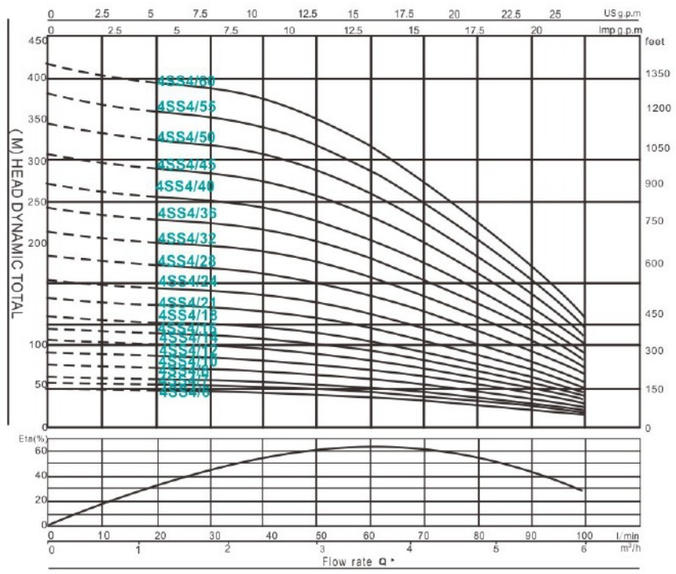

4SS(M)4 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery										n=2850r/min
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6
				l/min	0	10	20	30	40	50	60	70	80	90	100
4SSM4/6	4SS4/6	0.37	0.5	扬程(m) Rang of lift	45	42	41	40	39	36	33	30	24	19	14
4SSM4/7	4SS4/7	0.55	0.75		53	49	48	46	46	42	39	35	28	22	17
4SSM4/8	4SS4/8	0.75	1		60	56	54	53	52	48	44	40	32	26	19
4SSM4/10	4SS4/10	0.92	1.25		75	70	68	66	65	60	55	50	40	32	24
4SSM4/12	4SS4/12	1.1	1.5		90	84	82	79	78	72	66	60	48	38	29
4SSM4/14	4SS4/14	1.3	1.75		105	98	95	92	91	84	77	70	56	45	34
4SSM4/16	4SS4/16	1.5	2		120	112	109	106	104	96	88	80	64	51	38
4SSM4/18	4SS4/18	1.8	2.5		135	126	122	119	117	108	99	90	72	58	43
4SSM4/21	4SS4/21	2.2	3		157.5	147	143	139	137	126	116	105	84	67	50
4SSM4/24	4SS4/24	2.2	3		180	168	163	158	156	144	132	120	96	77	58
	4SS4/28	3	4		210	196	190	185	182	168	154	140	112	90	67
	4SS4/32	3	4		240	224	218	211	208	192	176	160	128	102	77
	4SS4/36	4	5.5		270	252	245	238	234	216	198	180	144	115	86
	4SS4/40	4	5.5		300	280	272	264	260	240	220	200	160	128	96
	4SS4/45	5.5	7.5		337.5	315	306	297	293	270	248	225	180	144	108
	4SS4/50	5.5	7.5		375	350	340	330	325	300	275	250	200	160	120
	4SS4/55	7.5	10		412.5	385	374	363	357.5	330	302.5	275	220	176	132
	4SS4/60	7.5	10		450	420	408	396	390	360	330	300	240	192	144

4SS6/4SN6

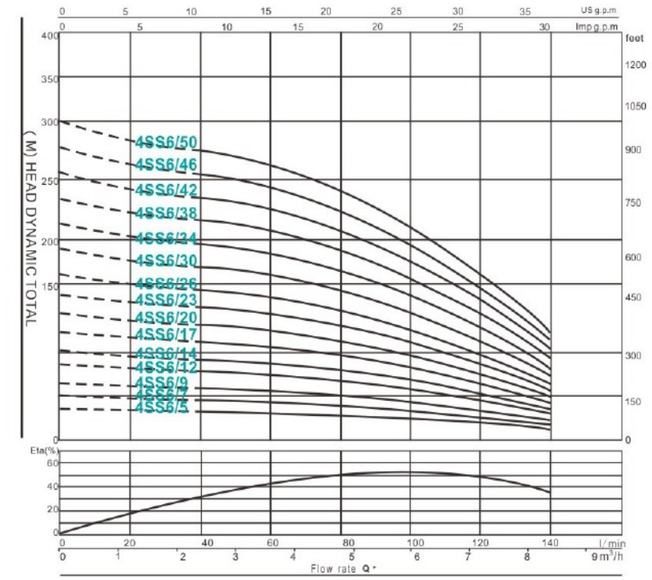

4SS(M)6 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery							n=2850r/min
220V~240V	380V~415V	KW	HP	M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5
				l/min	0	20	40	60	80	100	120	140
4SSM6/5	4SS6/5	0.37	0.5	扬程(m) Rang of lift	35	34	33	31	28	24	20	13
4SSM6/6	4SS6/6	0.55	0.75		42	40	39	37	34	28	24	15
4SSM6/7	4SS6/7	0.75	1		49	47	46	43	39	33	28	18
4SSM6/8	4SS6/8	0.92	1.25		56	54	52	49	45	38	32	20
4SSM6/9	4SS6/9	1.1	1.5		63	60	59	55	50	42	36	23
4SSM6/11	4SS6/11	1.3	1.75		77	74	72	67	62	52	44	28
4SSM6/12	4SS6/12	1.5	2		84	80	78	73	67	56	48	30
4SSM6/14	4SS6/14	1.8	2.5		98	94	91	85	78	66	56	35
4SSM6/17	4SS6/17	2.2	3		119	114	111	104	95	80	68	43
4SSM6/20	4SS6/20	2.2	3		140	134	130	122	112	94	80	50
	4SS6/23	3	4		161	154	150	140	129	108	92	58
	4SS6/26	3	4		182	174	169	159	146	122	104	65
	4SS6/30	4	5.5		210	201	195	183	168	141	120	75
	4SS6/34	4	5.5		238	228	221	207	190	160	136	85
	4SS6/38	5.5	7.5		266	255	247	232	213	179	152	95
	4SS6/42	5.5	7.5		294	281	273	256	235	197	168	105
	4SS6/46	7.5	10		322	308	299	281	258	216	184	115
	4SS6/50	7.5	10		350	335	325	305	280	235	200	125

4SS/4SN

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SS8/4SN8

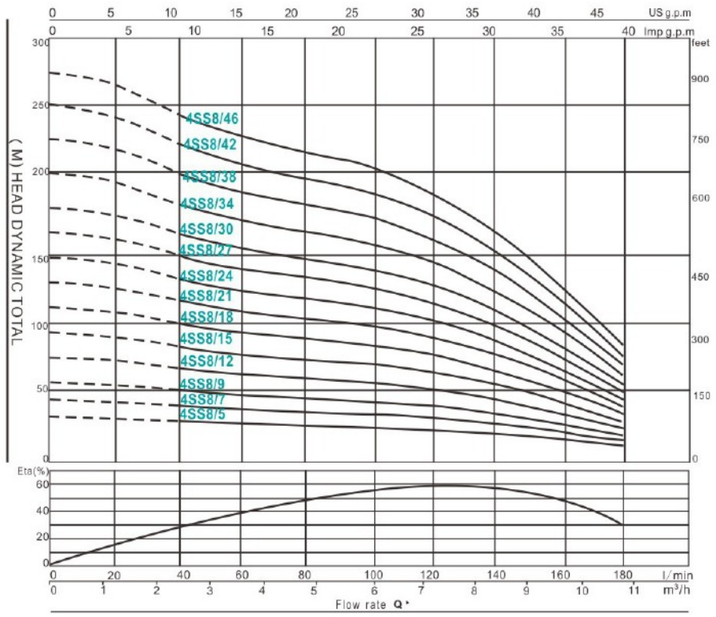

4SS(M)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min									
220V~240V	380V~415V	KW	HP	M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5	9.6	11
				l/min	0	20	40	60	80	100	120	140	160	180
4SSM8/5	4SS8/5	0.55	0.75	扬程(m) Rang of lift	31	31	28	26	25	24	22	18	14	9
4SSM8/6	4SS8/6	0.75	1		37	37	34	31	30	29	26	21	17	10.8
4SSM8/7	4SS8/7	0.92	1.25		43	43	39	36	35	34	31	25	20	12.6
4SSM8/8	4SS8/8	1.1	1.5		50	50	45	42	40	38	35	28	22	14.4
4SSM8/9	4SS8/9	1.3	1.75		56	56	50	47	45	43	40	32	25	16.2
4SSM8/10	4SS8/10	1.5	2		62	62	56	52	50	48	44	35	28	18
4SSM8/12	4SS8/12	1.8	2.5		74	74	67	62	60	58	53	42	34	21.6
4SSM8/15	4SS8/15	2.2	3		93	93	84	78	75	72	66	53	42	27
4SSM8/18	4SS8/18	2.2	3		111.6	112	101	94	90	86	79	63	50	32.4
	4SS8/21	3	4		130.2	130	118	109	105	101	92	74	59	37.8
	4SS8/24	3	4		148.8	149	134	125	120	115	106	84	67	43.2
	4SS8/27	4	5.5		167.4	167	151	140	135	130	119	95	76	48.6
	4SS8/30	4	5.5		186	186	168	156	150	144	132	105	84	54
	4SS8/34	5.5	7.5		210.8	211	190	177	170	163	150	119	95	61.2
	4SS8/38	5.5	7.5		235.6	236	213	198	190	182	167	133	106	68.4
	4SS8/42	7.5	10		260.4	260	235	218	210	202	185	147	118	75.6
	4SS8/46	7.5	10		285.2	285	258	239	230	221	202	161	129	82.8

4SS10/4SN10

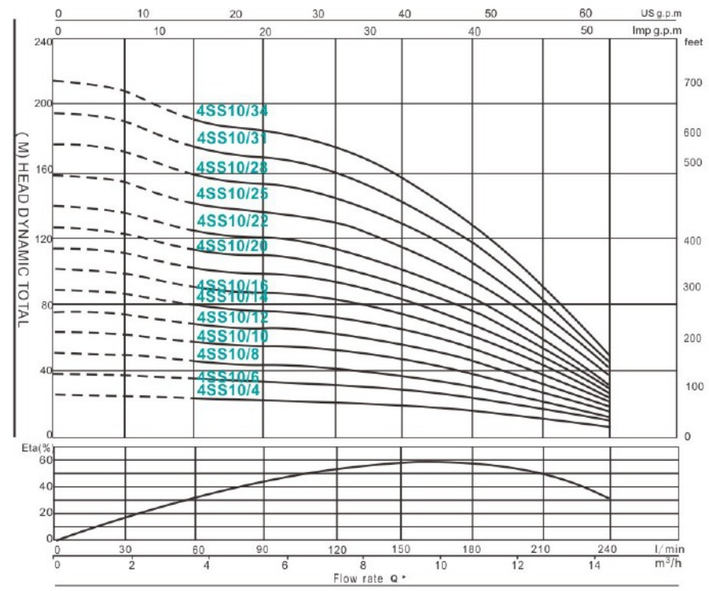

4SS(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min								
220V~240V	380V~415V	KW	HP	M³/H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4
				l/min	0	30	60	90	120	150	180	210	240
4SSM10/4	4SS10/4	0.75	1	扬程(m) Rang of lift	24	24	23	21	20	18	15	10	6
4SSM10/5	4SS10/5	0.92	1.25		30	30	29	27	25	23	19	13	8
4SSM10/6	4SS10/6	1.1	1.5		36	36	35	32	30	27	23	16	9
4SSM10/7	4SS10/7	1.3	1.75		42	42	41	37	35	32	27	18	11
4SSM10/8	4SS10/8	1.5	2		48	48	46	42	40	36	30	21	12
4SSM10/10	4SS10/10	1.8	2.5		60	60	58	53	50	45	38	26	15
4SSM10/12	4SS10/12	2.2	3		72	72	70	64	60	54	46	31	18
4SSM10/14	4SS10/14	2.2	3		84	84	81	74	70	63	53	36	21
	4SS10/16	3	4		96	96	93	85	80	72	61	42	24
	4SS10/18	3	4		108	108	104	95	90	81	68	47	27
	4SS10/20	4	5.5		120	120	116	106	100	90	76	52	30
	4SS10/22	4	5.5		132	132	128	117	110	99	84	57	33
	4SS10/25	5.5	7.5		150	150	145	133	125	113	95	65	38
	4SS10/28	5.5	7.5		168	168	162	148	140	126	106	73	42
	4SS10/31	7.5	10		186	186	180	164	155	140	118	81	47
	4SS10/34	7.5	10		204	204	197	180	170	153	129	88	51

4SS/4SN

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SS12/4SN12

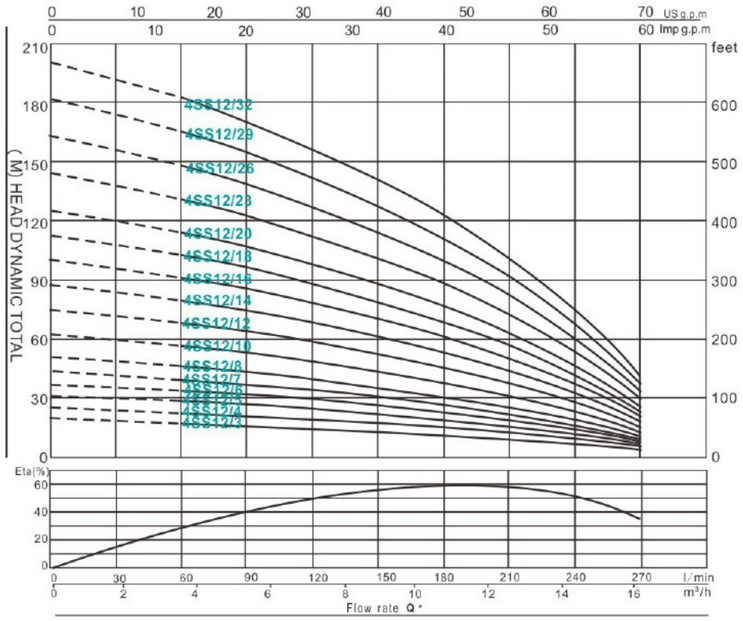

4SS(M)12 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min									
220V~240V	380V~415V	KW	HP	M³/H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16
				l/min	0	30	60	90	120	150	180	210	240	270
4SSM12/3	4SS12/3	0.75	1	扬程(m) Rang of lift	19	18	17	16	15	13	12	9	7	4.5
4SSM12/4	4SS12/4	0.92	1.25		25	24	22	21	20	17	16	12	9	6
4SSM12/5	4SS12/5	1.1	1.5		32	30	28	27	25	22	20	15	12	7.5
4SSM12/6	4SS12/6	1.3	1.75		38	36	33	32	30	26	24	18	14	9
4SSM12/7	4SS12/7	1.5	2		44	42	39	37	35	30	28	21	16	10.5
4SSM12/8	4SS12/8	1.8	2.5		50	48	44	42	40	34	32	24	18	12
4SSM12/10	4SS12/10	2.2	3		63	60	55	53	50	43	40	30	23	15
4SSM12/12	4SS12/12	2.2	3		76	72	66	64	60	52	48	36	28	18
	4SS12/14	3	4		88.2	84	77	74	70	60	56	42	32	21
	4SS12/16	3	4		100.8	96	88	85	80	69	64	48	37	24
	4SS12/18	4	5.5		113.4	108	99	95	90	77	72	54	41	27
	4SS12/20	4	5.5		126	120	110	106	100	86	80	60	46	30
	4SS12/23	5.5	7.5		144.9	138	127	122	115	99	92	69	53	34.5
	4SS12/26	5.5	7.5		163.8	156	143	138	130	112	104	78	60	39
	4SS12/29	7.5	10		182.7	174	160	154	145	125	116	87	67	43.5
	4SS12/32	7.5	10		201.6	192	176	170	160	138	128	96	74	48

4SS16/4SN16

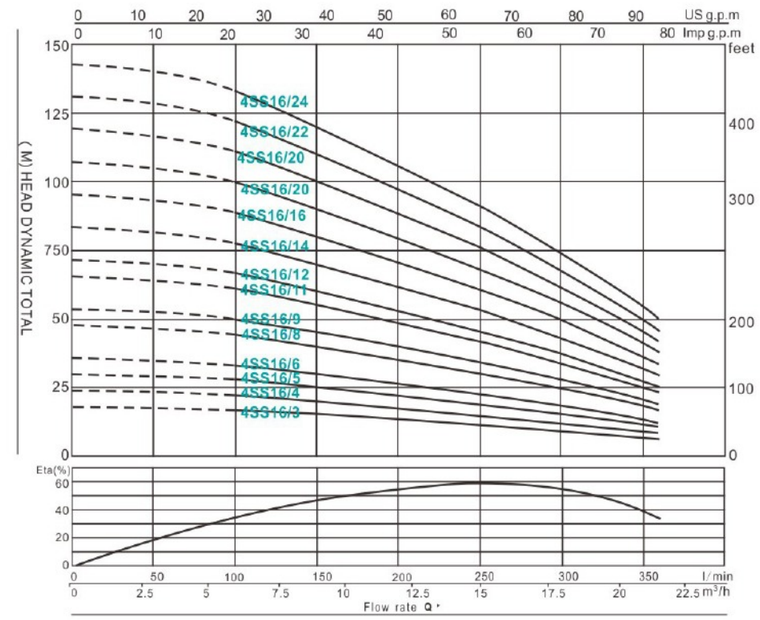

4SS(M)16 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min							
220V~240V	380V~415V	KW	HP	M³/H	0	3	6	9	12	15	18	21
				l/min	0	50	100	150	200	250	300	350
4SSM16/3	4SS16/3	1.1	1.5	扬程(m) Rang of lift	18	17	17	15	13	11	9	6
4SSM16/4	4SS16/4	1.3	1.75		24	23	22	20	17	12	12	8
4SSM16/5	4SS16/5	1.5	2		30	29	28	25	22	13	15	10
4SSM16/6	4SS16/6	1.8	2.5		36	35	33	30	26	14	18	12
4SSM16/8	4SS16/8	2.2	3		48	46	44	40	35	15	24	16
4SSM16/9	4SS16/9	2.2	3		54	52	50	45	39	16	27	18
	4SS16/11	3	4		66	64	61	55	48	17	33	22
	4SS16/12	3	4		72	70	66	60	52	18	36	24
	4SS16/14	4	5.5		84	81	77	70	61	19	42	28
	4SS16/16	4	5.5		96	93	88	80	70	20	48	32
	4SS16/18	5.5	7.5		108	104	99	90	78	21	54	36
	4SS16/20	5.5	7.5		120	116	110	100	87	22	60	40
	4SS16/22	7.5	10		132	128	121	110	96	23	66	44
	4SS16/24	7.5	10		144	139	132	120	104	24	72	48

4SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications For garden use and irrigation

Operating Conditions

Maximum uid temperature up to +50℃
C Maximum sand content: 0.25%
Maximum immersion: 80m
Minimum well diameter: 4"

Motor and Pump

Single-phase: 220 - 240V/50Hz
Three-phase: 380 - 415V/50Hz
Equip with start control box or digital auto-control box

Options on Request

Special mechanical seal
Other voltages or frequency 60Hz
Single phase motor with built-in capacitor

Series Products Model Example

4 SP (M) 2 / 6

- 6 — impeller's number
- 2 — capacity (m^3/h)
- (M) — single phase (three phase with no M marked)
- SP — series number
- 4 — well Ø4"

4SP2

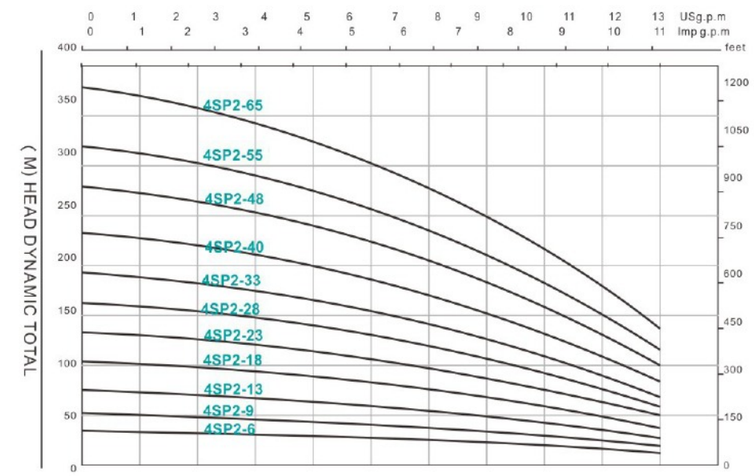

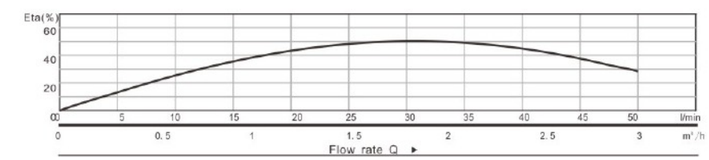

4SP(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery										n=2850r/min
1~	3~	KW	HP	Q M^3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3
220-240V	380-415V			l/min	0	5	10	15	20	25	30	35	40	45	50
4SPM2-6	4SP2-6	0.37	0.5	扬程(m) Rang of lift	35	34	33	32	30	28	26	23	20	17	13
4SPM2-9	4SP2-9	0.37	0.5		52	51	50	48	45	42	38	34	30	25	19
4SPM2-13	4SP2-13	0.55	0.75		76	74	72	69	65	61	55	50	43	36	27
4SPM2-18	4SP2-18	0.75	1		105	103	100	95	90	84	77	69	60	50	38
4SPM2-23	4SP2-23	1.1	1.5		134	131	127	122	115	107	98	88	77	64	48
4SPM2-28	4SP2-28	1.5	2		163	160	155	148	140	131	119	107	93	78	59
4SPM2-33	4SP2-33	1.5	2		192	188	183	175	166	154	141	126	110	91	70
4SPM2-40	4SP2-40	2.2	3		233	228	222	212	201	186	170	153	134	111	84
4SPM2-48	4SP2-48	2.2	3		280	274	266	254	241	224	205	183	160	133	101
-	4SP2-55	3	4		321	314	305	291	276	256	234	210	184	152	116
-	4SP2-65	3	4		379	371	360	344	326	303	277	248	217	180	137

4SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SP3

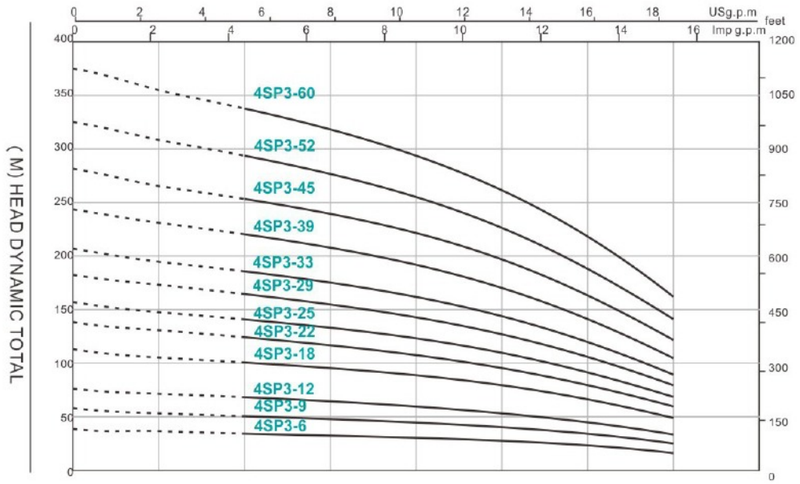

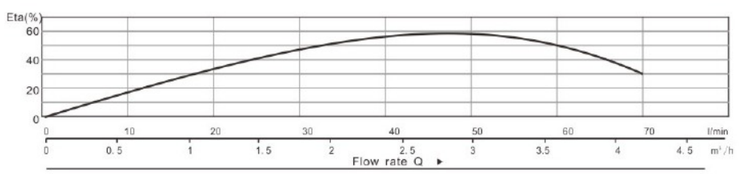

4SP(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min			
1~	3~	KW	HP	Q M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2
220-240V	380-415V			l/min	0	10	20	30	40	50	60	70
4SPM3-6	4SP3-6	0.37	0.5	扬程(m) Rang of lift	37	35	34	32	29	26	22	16
4SPM3-9	4SP3-9	0.55	0.75		56	53	50	48	44	39	32	24
4SPM3-12	4SP3-12	0.75	1		75	71	67	63	59	52	43	32
4SPM3-18	4SP3-18	1.1	1.5		112	106	101	95	88	78	65	48
4SPM3-22	4SP3-22	1.5	2		137	130	123	116	108	95	79	59
4SPM3-25	4SP3-25	1.5	2		155	148	140	132	123	108	90	67
4SPM3-29	4SP3-29	2.2	3		180	171	162	153	142	126	104	77
4SPM3-33	4SP3-33	2.2	3		205	195	185	174	162	143	119	88
-	4SP3-39	3	4		242	230	218	206	191	169	140	104
-	4SP3-45	3	4		280	266	252	238	221	195	162	120
-	4SP3-52	4	5.5		323	307	291	275	255	225	187	139
-	4SP3-60	4	5.5		373	354	336	317	294	260	216	160

4SP5

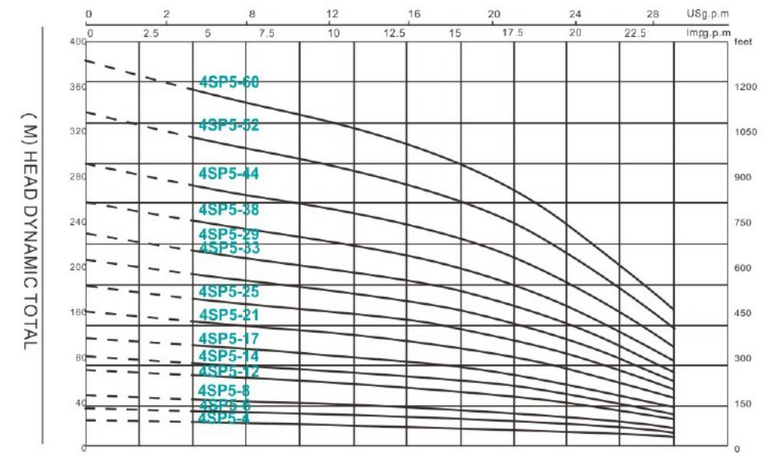

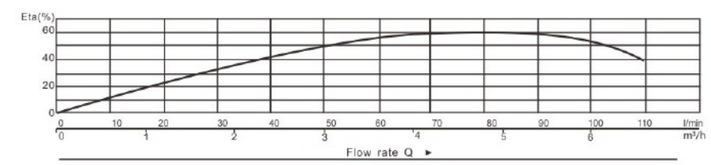

4SP(M)5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery					n=2850r/min				
1~	3~	KW	HP	Q M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	5.4	6	6.6
220-240V	380-415V			l/min	0	10	20	30	40	50	60	70	90	100	110
4SPM5-4	4SP5-4	0.37	0.5	扬程(m) Rang of lift	25	25	24	23	22	21	20	19	15	12	9
4SPM5-6	4SP5-6	0.55	0.75		38	37	35	34	33	31	30	28	22	18	13
4SPM5-8	4SP5-8	0.75	1		51	49	47	45	44	42	40	37	29	24	18
4SPM5-12	4SP5-12	1.1	1.5		76	74	71	68	66	63	60	56	44	36	27
4SPM5-14	4SP5-14	1.5	2		89	86	82	79	77	73	70	65	51	42	31
4SPM5-17	4SP5-17	1.5	2		108	104	100	96	93	89	85	79	62	51	38
4SPM5-21	4SP5-21	2.2	3		134	129	124	119	115	110	105	98	77	63	47
4SPM5-25	4SP5-25	2.2	3		159	153	147	142	137	131	125	117	92	75	56
-	4SP5-29	3	4		185	178	171	164	159	152	145	135	106	87	65
-	4SP5-33	3	4		210	202	194	187	180	173	165	154	121	99	74
-	4SP5-38	4	5.5		242	233	224	215	208	200	190	177	139	114	86
-	4SP5-44	4	5.5		280	270	259	249	241	231	220	205	161	132	99
-	4SP5-52	5.5	7.5		331	319	306	295	284	273	260	243	191	156	117
-	4SP5-60	5.5	7.5		382	368	353	340	328	315	300	280	220	180	135

4SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SP8

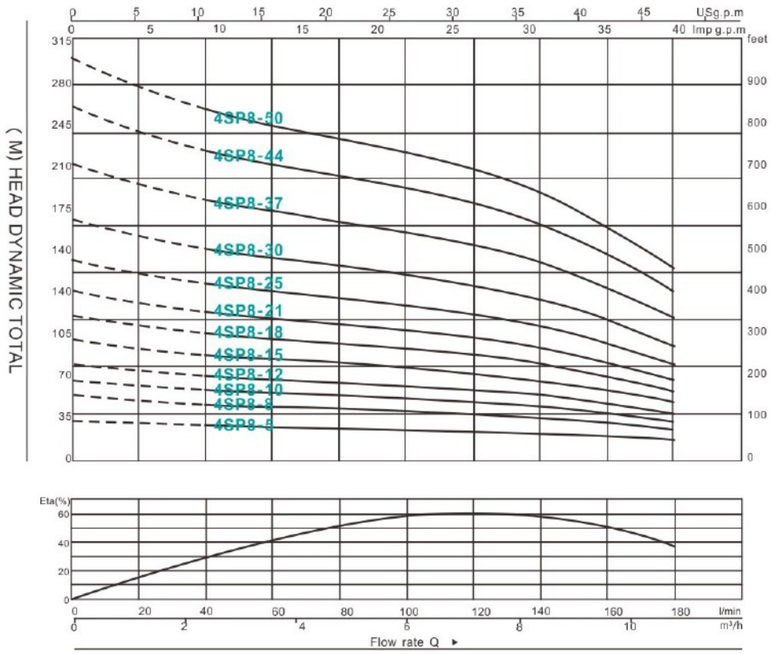

4SP(M)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min									
1~	3~	KW	HP	Q M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8
220-240V	380-415V			l/min	0	20	40	60	80	100	120	140	160	180
4SPM8-5	4SP8-5	0.75	1	扬程(m) Rang of lift	30	28	26	25	24	23	22	20	17	14
4SPM8-7	4SP8-7	1.1	1.5		42	39	37	35	34	32	31	28	24	20
4SPM8-8	4SP8-8	1.5	2		48	45	42	40	38	37	35	32	28	23
4SPM8-10	4SP8-10	1.5	2		60	56	53	50	48	46	44	40	35	29
4SPM8-12	4SP8-12	2.2	3		72	67	63	60	58	55	53	48	42	34
4SPM8-15	4SP8-15	2.2	3		90	84	79	75	72	69	66	60	52	43
-	4SP8-18	3	4		108	100	95	90	86	83	79	72	63	51
-	4SP8-21	4	5.5		126	117	110	105	101	97	92	84	73	60
-	4SP8-25	4	5.5		150	140	132	126	120	115	109	100	87	71
-	4SP8-30	5.5	7.5		180	167	158	151	144	138	131	120	104	86
-	4SP8-37	5.5	7.5		222	206	195	186	178	170	162	148	129	106
-	4SP8-44	7.5	10		264	246	231	221	211	202	193	176	153	126
-	4SP8-50	7.5	10		300	279	263	251	240	230	219	200	174	143

4SP14

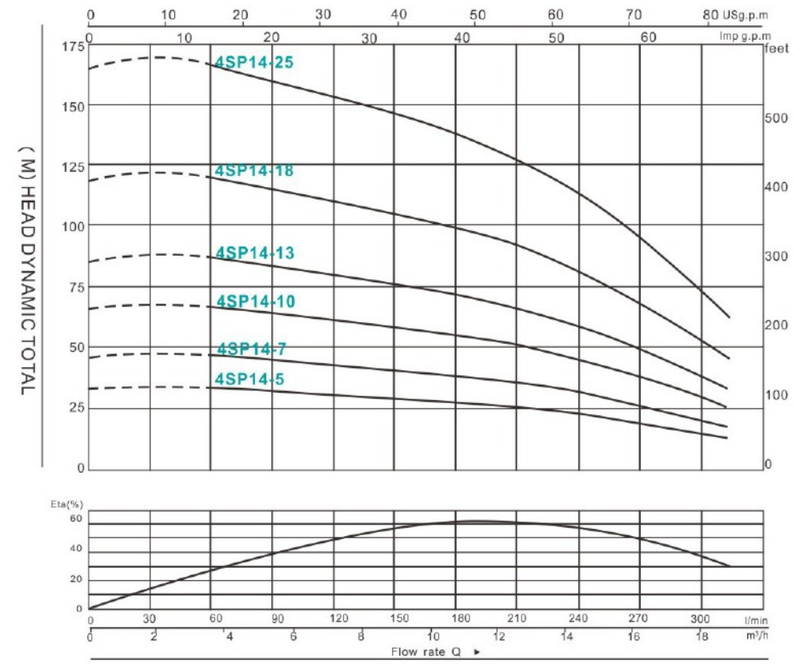

4SP(M)14 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery n=2850r/min										
1~	3~	KW	HP	Q M³/H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2	18
220-240V	380-415V			l/min	0	30	60	90	120	150	180	210	240	270	300
4SPM14-5	4SP14-5	1.5	2	扬程(m) Rang of lift	33	34	33	32	31	29	28	26	23	19	15
4SPM14-7	4SP14-7	2.2	3		46	48	46	45	43	41	39	36	32	27	20
-	4SP14-10	3	4		66	68	66	64	62	58	55	51	45	38	29
-	4SP14-13	4	5.5		85	88	86	83	80	76	72	67	59	49	38
-	4SP14-18	5.5	7.5		118	122	120	115	111	105	99	92	81	68	53
-	4SP14-25	7.5	10		164	170	166	160	154	146	138	128	113	95	73

6SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use,?for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum uid temperature up to +50℃
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 6"

Motor and Pump

Rewindable motor or Hermetically-Sealed motor
Single-phase:?220?- 240V/50Hz
Three-phase: 380?- 415V/50Hz
□ Direct start (1 cable)
□ Star-delta start (2 cables)
Equip with start control box or digital auto-control box
NEMA dimension standards

Options on request

Special mechanical seal
Other voltages or frequency 60Hz

Warranty: 1 year

(according to our general sales conditions)

Series Products Model Example

6 SP (M) 17 / 4

- impeller's number
- capacity (m^3/h)
- single phase (three phase with no M marked)
- series number
- well Ø6"

6SP17

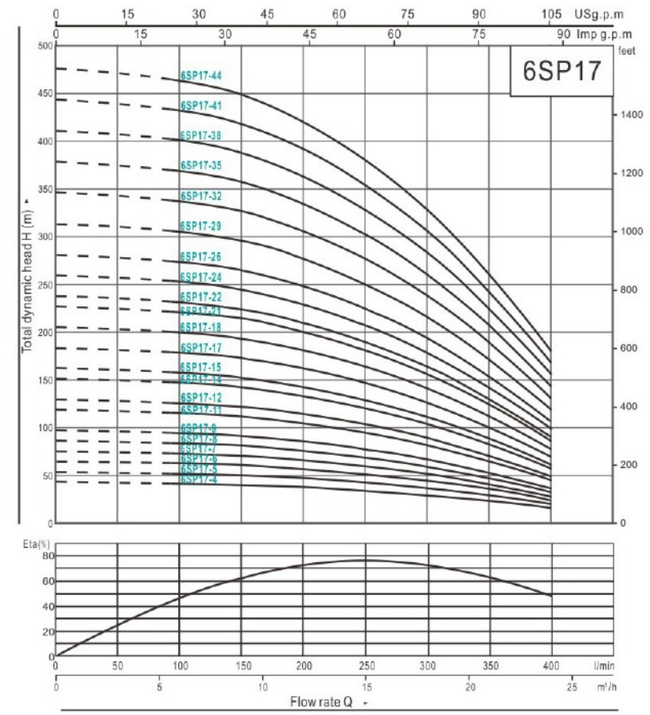

6SP(M)17 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery								n=2850r/min
1~	3~	KW	HP	Q M^3/H	0	3	6	9	12	15	18	21	24
220-240V	380-415V			l/min	0	50	100	150	200	250	300	350	400
6SPM17-4	6SP17-4	2.2	3		43	43	41	41	38	36	30	25	16
6SPM17-5	6SP17-5	3	4		54	54	53	52	48	44	38	31	20
6SPM17-6	6SP17-6	4	5.5		65	65	64	62	58	53	45	37	24
6SPM17-7	6SP17-7	4	5.5		76	76	74	72	67	61	53	43	28
6SPM17-8	6SP17-8	5.5	7.5		87	86	85	82	77	70	60	49	32
6SPM17-9	6SP17-9	5.5	7.5		98	97	95	93	86	79	68	55	36
	6SP17-11	7.5	10		119	119	117	113	106	97	83	67	45
	6SP17-12	7.5	10		130	130	127	124	115	105	90	73	49
	6SP17-14	9.2	12.5		152	151	148	144	134	123	105	85	57
	6SP17-15	9.2	12.5		163	162	159	155	144	132	113	92	61
	6SP17-17	11	15	扬程(m) Rang of lift	184	184	180	175	163	149	128	104	69
	6SP17-19	11	15		206	205	201	196	182	167	143	116	77
	6SP17-21	13	17.5		228	227	223	216	202	184	158	128	85
	6SP17-22	13	17.5		238	238	233	227	211	193	165	134	89
	6SP17-24	15	20		260	259	254	247	230	211	180	146	97
	6SP17-26	15	20		282	281	276	268	250	228	195	158	105
	6SP17-29	18.5	25		314	313	307	299	278	252	218	173	117
	6SP17-32	18.5	25		347	346	339	330	307	278	240	193	130
	6SP17-35	22	30		379	378	371	361	336	305	263	209	142
	6SP17-38	22	30		412	410	403	391	365	330	285	227	154
	6SP17-41	26	35		444	443	435	422	394	357	308	246	166
	6SP17-44	26	35		477	475	466	453	422	382	330	262	178

6SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

6SP30

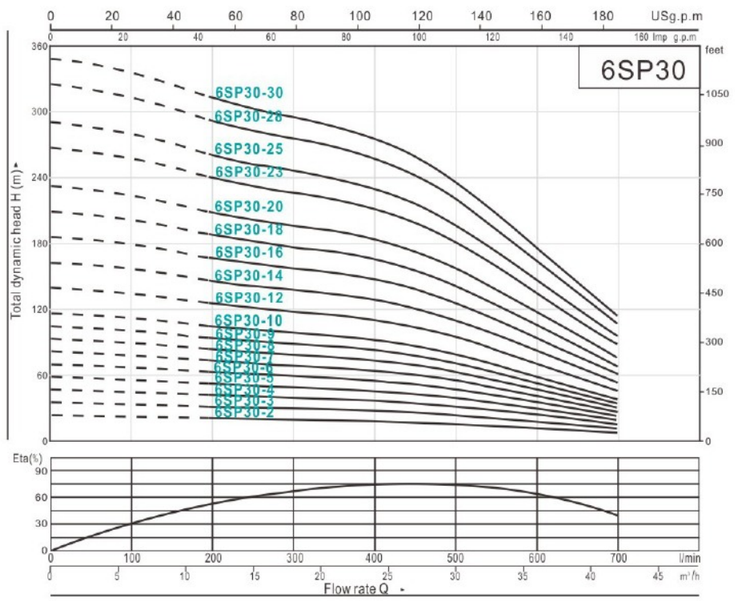

6SP(M)30 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery							n=2850r/min
1~	3~	KW	HP	Q M³/H	0	6	12	18	24	30	36	42
220-240V	380-415V			l/min	0	100	200	300	400	500	600	700
6SPM30-2	6SP30-2	2.2	3	扬程(m) Rang of lift	23	21	21	20	19	17	12	9
6SPM30-3	6SP30-3	3	4		35	34	32	30	28	24	18	12
6SPM30-4	6SP30-4	4	5.5		46	45	43	40	37	32	24	16
6SPM30-5	6SP30-5	5.5	7.5		58	56	54	51	47	40	31	20
6SPM30-6	6SP30-6	5.5	7.5		70	67	64	61	56	48	37	24
	6SP30-7	7.5	10		81	78	75	71	65	56	43	28
	6SP30-8	7.5	10		93	90	86	81	74	64	49	32
	6SP30-9	9.2	12.5		104	101	96	91	84	72	55	36
	6SP30-10	9.2	12.5		116	112	107	101	93	80	61	40
	6SP30-12	11	15		139	134	128	121	112	96	73	48
	6SP30-14	13	17.5		162	157	150	141	130	112	85	56
	6SP30-16	15	20		186	179	171	162	149	128	98	64
	6SP30-18	18.5	25		209	202	193	182	167	144	110	72
	6SP30-20	18.5	25		232	224	214	202	186	160	122	80
	6SP30-23	22	30		267	258	246	232	214	184	140	92
	6SP30-25	22	30		290	280	268	253	233	200	153	100
	6SP30-28	26	35		325	314	300	283	260	224	171	112
	6SP30-30	26	35		348	336	321	303	279	240	183	120

6SP46

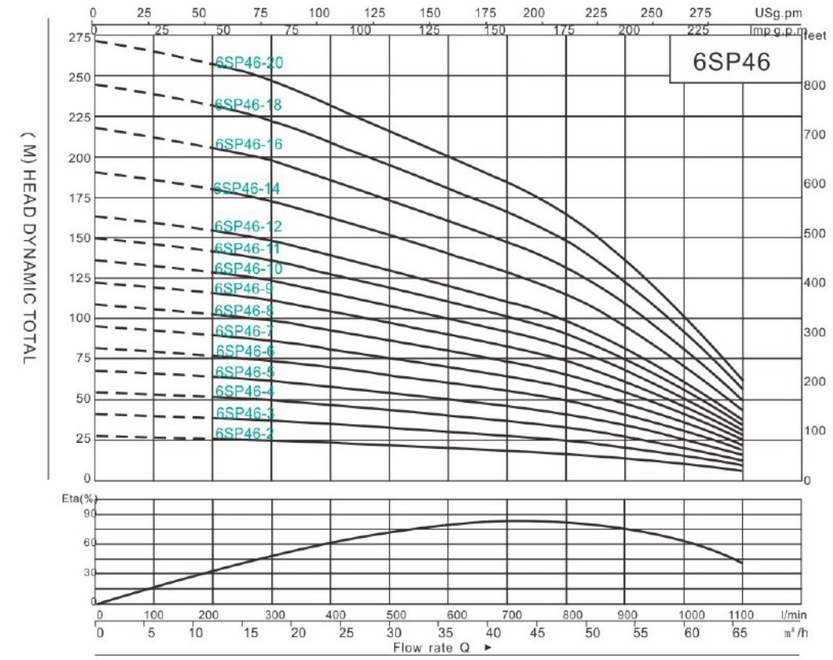

6SP(M)46 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery											n=2850r/min
1~	3~	KW	HP	Q M³/H	0	6	12	18	24	30	36	42	48	54	60	66
220-240V	380-415V			l/min	0	100	200	300	400	500	600	700	800	900	1000	1100
6SPM46-2	6SP46-2	3	4	扬程(m) Rang of lift	27	26	25	25	23	22	20	19	17	14	10	7
6SPM46-3	6SP46-3	4	5.5		41	40	39	38	34	34	31	28	25	22	15	10
6SPM46-4	6SP46-4	5.5	7.5		54	53	52	50	46	45	41	37	33	29	20	13
	6SP46-5	7.5	10		68	66	65	63	57	56	52	47	42	36	26	16
	6SP46-6	9.2	12.5		81	79	78	76	68	67	62	56	50	43	31	19
	6SP46-7	11	15		95	92	91	88	80	78	72	65	58	50	36	22
	6SP46-8	13	17.5		108	106	104	101	91	90	82	74	66	58	41	26
	6SP46-9	15	20		122	119	117	113	103	101	93	84	75	65	46	29
	6SP46-10	15	20		135	132	130	126	114	112	103	93	83	72	51	32
	6SP46-11	18.5	25		149	145	143	139	135	123	113	102	91	79	56	35
	6SP46-12	18.5	25		162	158	156	151	137	134	124	112	100	86	61	38
	6SP46-14	22	30		189	185	182	176	160	157	144	130	116	101	71	45
	6SP46-16	26	35		216	211	208	202	182	179	165	149	133	115	82	51
	6SP46-18	30	40		243	238	234	227	205	202	185	167	149	130	92	58
	6SP46-20	30	40		270	264	260	252	228	224	206	186	166	144	102	64

6SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

6SP60

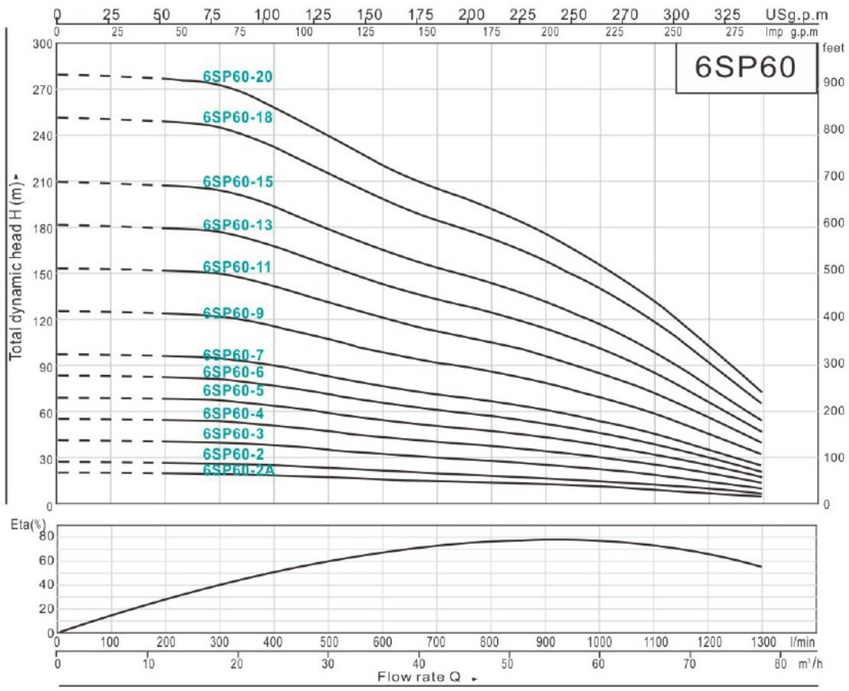

6SP(M)46 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery													n=2850r/min
1~	3~	KW	HP	Q M³/H	0	6	12	18	24	30	36	42	48	54	60	66	72	78
220-240V	380-415V			l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300
6SPM60-2A	6SP60-2A	4	5.5	扬程(m) Rang of lift	21	21	20	20	19	17	16	15	13	13	12	10	7	6
	6SP60-2	5.5	7.5		28	28	28	27	26	24	22	21	19	18	16	13	10	7
	6SP60-3	7.5	10		43	42	42	41	39	36	33	32	29	27	24	20	15	11
	6SP60-4	9.2	12.5		57	56	56	54	52	48	44	42	38	36	32	26	20	14
	6SP60-5	11	15		71	71	70	68	66	61	56	53	48	46	40	33	26	18
	6SP60-6	13	17.5		85	85	84	82	79	73	67	64	58	55	48	40	31	22
	6SP60-7	15	20		99	99	98	95	92	85	78	74	67	64	56	46	36	25
	6SP60-9	18.5	25		128	127	126	122	118	109	100	95	86	82	72	59	46	32
	6SP60-11	22	30		156	155	154	150	144	133	122	117	106	100	88	73	56	40
	6SP60-13	26	35		185	183	182	177	170	157	144	138	125	116	104	86	66	47
	6SP60-15	30	40		213	212	210	204	197	182	167	159	144	135	120	99	77	54
	6SP60-18	37	50		256	254	252	245	236	218	200	191	173	161	144	119	92	65
	6SP60-20	37	50		284	280	279	272	262	242	222	212	192	178	160	132	102	72

8SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use,?for civil and industrial applications
For garden use and irrigation

Operating conditions

Operating conditions
Maximum uid temperature up to +50℃
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 8"

Motor and Pump

Rewindable motor
Single-phase:220V- 240V/50Hz
Three-phase: 380V- 415V/50Hz
Equip with start control box or digital auto-control box
NEMA dimension standards

Options on request

Special mechanical seal
Other voltages or frequency 60Hz

Warranty: 1 year

(according to our general sales conditions)

Series Products Model Example

8 SP 77 / 4

- 4 — impeller's number
- 77 — capacity (m³/h)
- SP — series number
- 8 — well Ø8"

8SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

8SP77

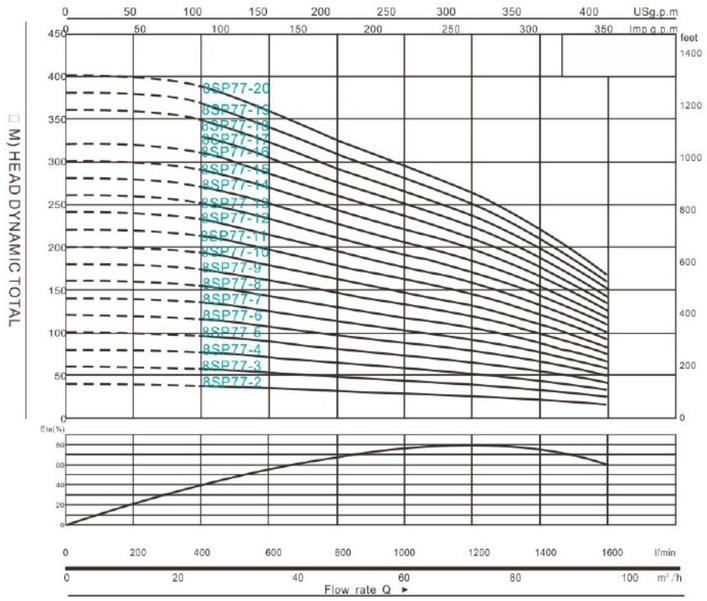

8SP77 PERFORMANCE DATA 50Hz

型号 Model	功率 Power		流量(T/h) Flow rate	输出 Delivery					n=2850r/min			
3~	KW	HP	Q M³/H	0	12	24	36	48	60	72	84	96
380-415V			l/min	0	200	400	600	800	1000	1200	1400	1600
8SP77-2	7.5	10	扬程(m) Rang of lift	41	41	40	37	34	31	28	23	17
8SP77-3	11	15		61	61	59	55	50	46	41	34	26
8SP77-4	15	20		81	81	78	73	66	61	54	45	34
8SP77-5	18.5	25		102	101	98	91	83	76	68	56	43
8SP77-6	22	30		122	121	118	109	100	91	82	67	52
8SP77-7	26	35		142	141	137	127	116	106	95	78	60
8SP77-8	30	40		162	161	157	146	133	122	109	90	69
8SP77-9	30	40		182	181	176	164	149	136	122	101	77
8SP77-10	37	50		202	201	196	182	166	150	136	112	86
8SP77-11	37	50		222	221	216	200	183	164	149	123	95
8SP77-12	45	60		241	240	235	218	199	180	162	134	103
8SP77-13	55	75		263	263	255	237	213	195	176	146	112
8SP77-14	55	75		283	283	274	255	230	210	190	157	120
8SP77-15	55	75		304	303	294	273	248	225	203	168	128
8SP77-16	63	85		324	323	314	291	263	240	216	179	136
8SP77-17	63	85		344	343	333	309	280	254	229	190	145
8SP77-18	63	85		365	364	353	328	295	268	242	202	153
8SP77-19	75	100		385	384	372	346	312	283	256	213	162
8SP77-20	75	100		405	403	392	364	330	298	269	224	170

8SP95

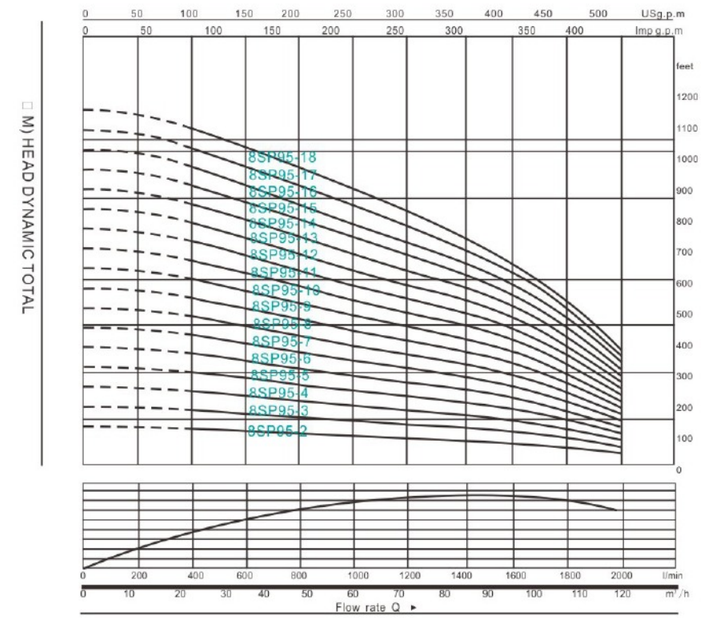

8SP95 PERFORMANCE DATA 50Hz

型号 Model	功率 Power		流量(T/h) Flow rate	输出 Delivery						n=2850r/min				
3~	KW	HP	Q M³/H	0	12	24	36	48	60	72	84	96	108	120
380-415V			l/min	0	200	400	600	800	1000	1200	1400	1600	1800	2000
8SP95-2	9.2	12.5	扬程(m) Rang of lift	42	41	40	38	35	33	31	29	26	21	15
8SP95-3	13	17.5		63	62	61	58	53	48	46	42	38	31	22
8SP95-4	18.5	25		84	83	81	77	70	64	61	56	50	41	29
8SP95-5	22	30		106	104	101	96	88	81	76	71	62	51	36
8SP95-6	26	35		127	125	121	115	106	97	91	85	75	61	43
8SP95-7	30	40		148	146	141	134	123	113	106	99	87	71	50
8SP95-8	37	50		169	166	162	154	141	129	122	113	99	81	57
8SP95-9	37	50		190	187	182	173	158	145	137	127	111	91	64
8SP95-10	45	60		211	208	202	191	176	161	152	140	124	101	71
8SP95-11	55	75		232	229	222	210	194	177	167	154	136	111	78
8SP95-12	55	75		253	250	242	229	211	193	182	168	149	121	85
8SP95-13	55	75		274	270	263	248	229	209	196	182	162	131	92
8SP95-14	63	85		295	291	283	267	246	225	211	197	174	141	99
8SP95-15	75	100		317	312	303	285	264	242	226	211	186	150	107
8SP95-16	75	100		338	333	323	304	282	258	241	224	199	160	114
8SP95-17	75	100		359	354	343	323	299	274	257	238	212	170	121
8SP95-18	92	125		380	376	364	342	317	290	272	252	224	180	128

6SR

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum uid temperature up to +35□
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 6"

Motor and Pump

Rewindable motor
Single-phase:220V- 240V/50Hz
Three-phase: 380V- 415V/50Hz
Equip with start control box or digital auto-control box
NEMA dimension standards

Options on request

Special mechanical seal
Other voltages or frequency 60Hz
Single phase motor with built-in capacitor
Single phase motor with built-in capacitor

Warranty: 1 year

(according to our general sales conditions)

Series Products Model Example

6 SR (M) 10 / 5

- 5 — impeller's number
- 10 — capacity (m^3/h)
- (M) — single phase (three phase with no M marked)
- SR — series number
- 6 — well Ø6"

6SR10

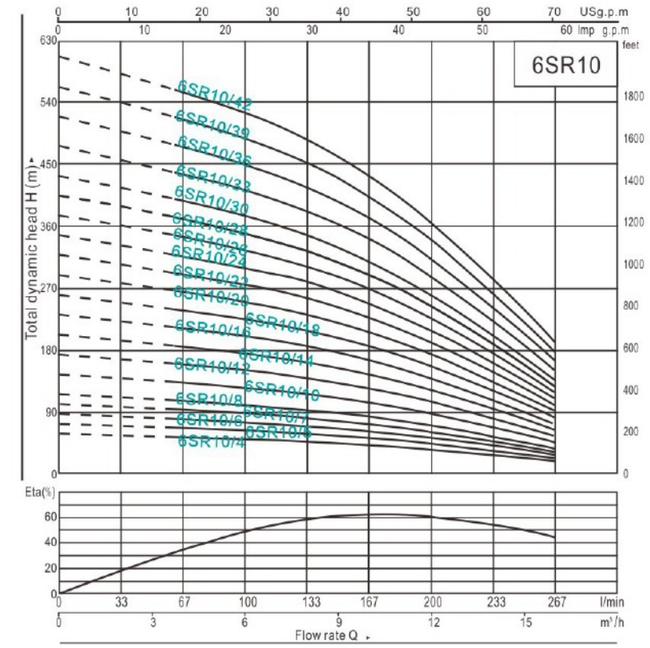

6SR(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery				n=2850r/min				
1~	3~	KW	HP	Q M^3/H l/min	0	2	4	6	8	10	12	14	16
220-240V	380-415V				0	33	67	100	133	167	200	233	267
6SRM10-4	6SR10-4	2.2	3	扬程(m) Rang of lift	58	55	53	50	46	41	35	27	18
6SRM10-5	6SR10-5	3	4		73	69	67	63	58	52	44	34	23
6SRM10-6	6SR10-6	4	5.5		87	83	80	76	70	62	53	41	28
6SRM10-7	6SR10-7	4	5.5		102	97	93	88	81	72	62	48	32
6SRM10-8	6SR10-8	5.5	7.5		116	110	106	101	93	82	70	54	37
6SRM10-10	6SR10-10	5.5	7.5		145	138	133	126	116	103	88	68	46
	6SR10-12	7.5	10		174	166	160	151	139	124	106	82	55
	6SR10-14	7.5	10		203	193	186	176	162	144	123	95	64
	6SR10-16	9.2	12.5		232	221	213	202	186	165	141	109	74
	6SR10-18	9.2	12.5		261	248	239	227	209	185	158	122	83
	6SR10-20	11	15		290	276	266	252	232	206	176	136	92
	6SR10-22	11	15		319	304	293	277	255	227	194	150	101
	6SR10-24	13	17.5		348	331	319	302	278	247	211	163	110
	6SR10-26	13	17.5		377	359	346	328	302	268	229	177	120
	6SR10-28	15	20		406	386	372	353	325	288	246	190	129
	6SR10-30	15	20		435	414	399	378	348	309	264	204	138
	6SR10-33	18.5	25		479	455	439	416	383	340	290	224	152
	6SR10-36	18.5	25		522	497	479	454	418	371	316	243	166
	6SR10-39	22	30		566	538	519	491	452	402	341	263	179
	6SR10-42	22	30		609	580	559	529	487	433	368	283	193

6SR

不锈钢井用潜水泵系列

stainless steel well submersible pump series

6SR18

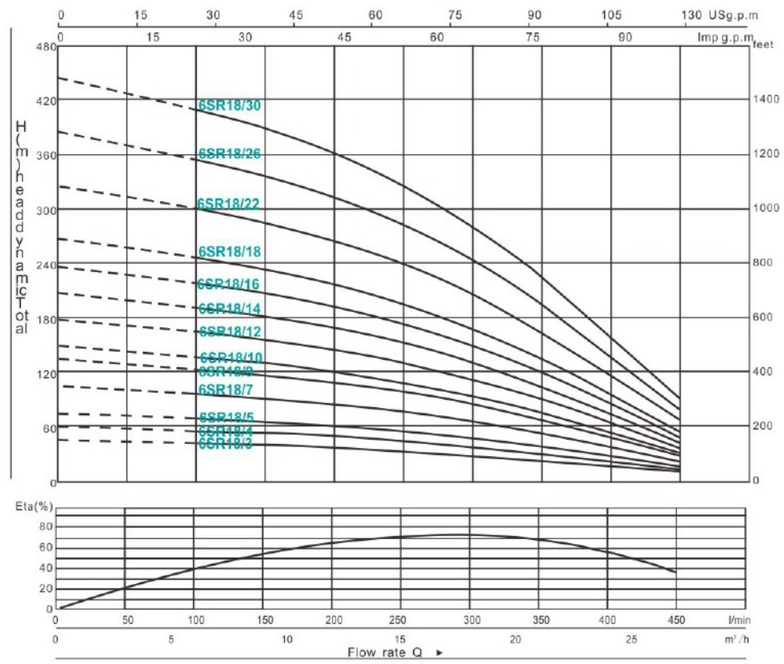

6SR(M)18 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									n=2850r/min
1~	3~	KW	HP	Q M³/H	0	3	6	9	12	15	18	21	24	27
220-240V	380-415V			l/min	0	50	100	150	200	250	300	350	400	450
6SRM18-3	6SR18-3	2.2	3	扬程(m) Rang of lift	45	43	40	39	36	32	28	22	16	9
6SRM18-4	6SR18-4	3	4		60	58	54	52	48	43	38	30	22	12
6SRM18-5	6SR18-5	4	5.5		76	72	67	66	61	54	47	37	27	16
6SRM18-7	6SR18-7	5.5	7.5		106	101	94	92	85	75	66	52	38	22
	6SR18-9	7.5	10		136	130	121	118	109	96	85	67	49	28
	6SR18-10	7.5	10		151	144	134	131	121	107	94	74	54	31
	6SR18-12	9.2	12.5		181	173	161	157	145	128	113	89	65	37
	6SR18-14	11	15		211	202	188	183	169	150	132	104	76	43
	6SR18-16	13	17.5		242	230	214	210	194	171	150	118	87	50
	6SR18-18	15	20		272	259	241	236	218	193	169	133	97	56
	6SR18-22	18.5	25		332	317	295	288	266	235	207	163	118	68
	6SR18-26	22	30		393	372	348	341	314	278	244	192	139	81
	6SR18-30	26	35		453	430	402	393	363	321	282	222	160	93

6SR30

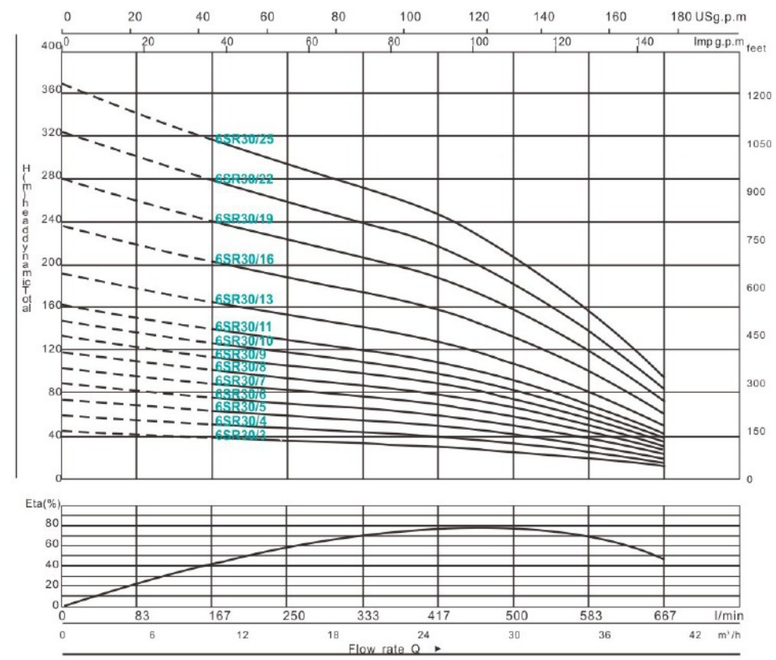

6SR(M)30 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery								n=2850r/min
1~	3~	KW	HP	Q M³/H	0	5	10	15	20	25	30	35	40
220-240V	380-415V			l/min	0	83	167	250	333	417	500	583	667
6SRM30-3	6SR30-3	3	4	扬程(m) Rang of lift	44	41	38	36	33	30	25	20	10
6SRM30-4	6SR30-4	4	5.5		59	56	52	48	45	41	34	26	15
6SRM30-5	6SR30-5	5.5	7.5		74	70	65	61	56	51	42	32	19
	6SR30-6	7.5	10		88	83	77	73	67	61	51	38	22
	6SR30-7	7.5	10		103	96	90	85	78	71	59	45	26
	6SR30-8	9.2	12.5		118	110	103	97	89	81	67	51	30
	6SR30-9	11	15		132	123	115	109	100	91	76	58	33
	6SR30-10	11	15		147	137	128	121	111	101	84	64	37
	6SR30-11	13	17.5		162	151	140	133	122	111	92	70	41
	6SR30-13	15	20		191	178	165	157	144	131	109	83	48
	6SR30-16	18.5	25		235	219	203	194	178	160	134	102	59
	6SR30-19	22	30		279	260	241	229	211	190	160	122	70
	6SR30-22	26	35		323	301	279	265	242	220	185	141	81
	6SR30-25	30	40		368	343	318	301	276	251	210	160	93

6SR

不锈钢井用潜水泵系列

stainless steel well submersible pump series

6SR45

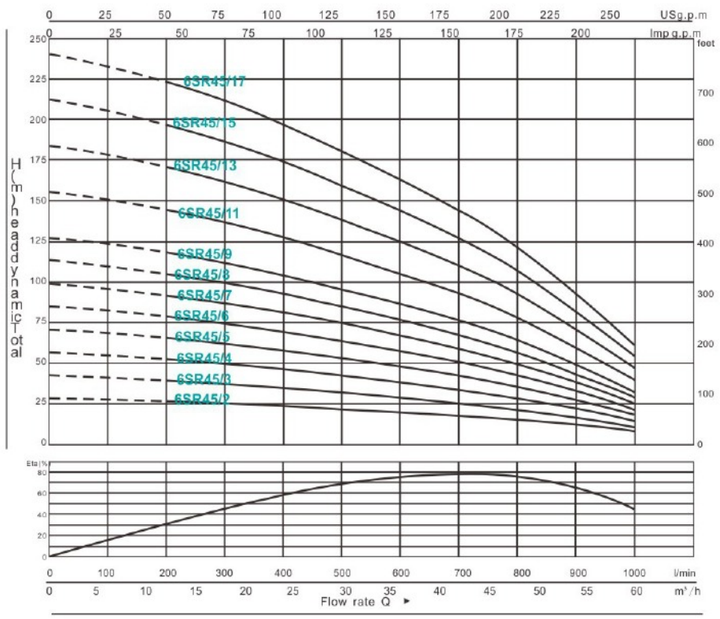

6SR(M)45 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery											n=2850r/min
1~	3~	KW	HP	Q M³/H	0	6	12	18	24	30	36	42	48	54	60	
220-240V	380-415V			l/min	0	100	200	300	400	500	600	700	800	900	1000	
6SRM45-2	6SR45-2	3	4	扬程(m) Rang of lift	28	27	26	24	23	21	19	18	15	12	8	
6SRM45-3	6SR45-3	4	5.5		42	41	40	37	35	32	30	27	22	17	12	
6SRM45-4	6SR45-4	5.5	7.5		56	54	53	49	46	42	40	35	29	22	14	
	6SR45-5	7.5	10		71	68	67	61	58	53	50	44	36	28	19	
	6SR45-6	9.2	12.5		85	82	80	73	70	64	60	53	43	34	23	
	6SR45-7	11	15		99	95	91	85	81	74	69	61	50	39	26	
	6SR45-8	13	17.5		113	109	104	98	91	85	78	70	58	45	30	
	6SR45-9	15	20		127	122	117	110	104	95	88	78	65	50	33	
	6SR45-11	18.5	25		155	150	144	134	126	117	106	95	79	62	41	
	6SR45-13	22	30		183	177	170	159	150	138	126	113	94	73	48	
	6SR45-15	26	35		212	204	197	183	171	159	145	130	108	84	55	
	6SR45-17	30	40		240	231	223	207	195	180	164	147	122	95	62	

6SR60

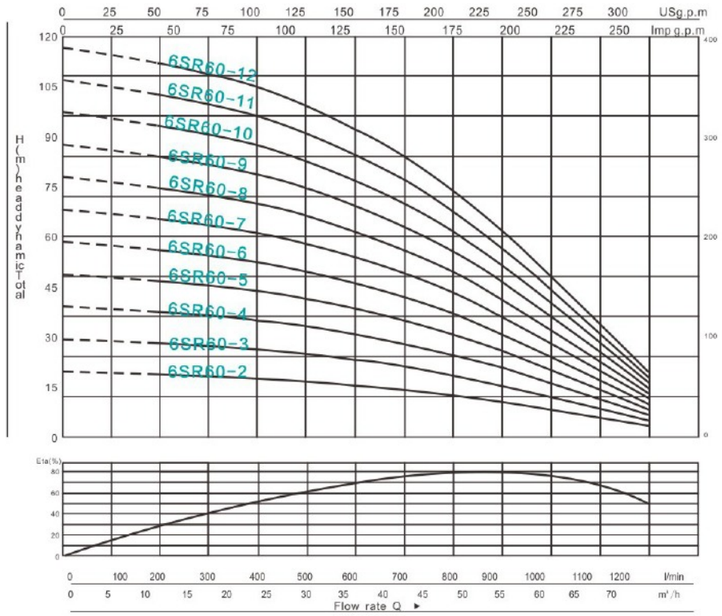

6SR(M)60 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery												n=2850r/min
1~	3~	KW	HP	Q M³/H	0	6	12	18	24	30	36	42	48	54	60	66	72
220-240V	380-415V			l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200
6SRM60-2	6SR60-2	4	5.5	扬程(m) Rang of lift	25	24	23	23	22	21	20	18	16	12	10	6	4
6SRM60-3	6SR60-3	5.5	7.5		38	36	36	35	34	32	28	28	23	20	16	11	6
	6SR60-4	7.5	10		50	48	47	46	45	42	39	37	30	26	21	14	8
	6SR60-5	11	15		62	61	59	58	56	53	49	46	38	33	26	18	11
	6SR60-6	15	20		74	73	70	70	67	64	59	55	46	40	31	22	13
	6SR60-7	18.5	25		86	85	82	81	78	74	66	62	53	46	36	25	15
	6SR60-8	18.5	25		99	97	94	93	88	85	77	72	61	53	42	29	17
	6SR60-9	22	30		111	109	105	104	100	95	86	81	68	59	47	32	19
	6SR60-10	26	35		123	121	117	114	110	104	96	90	76	66	52	36	21
	6SR60-11	30	40		135	133	129	126	121	115	106	99	84	73	57	40	23
	6SR60-12	30	40		147	145	141	137	132	126	115	107	91	79	62	43	25

4SK

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SK Series features

1.Submeribie motor that can dive to the depth of 120 meters;

2.Pump use environment: room temperatere, clear water;

3.Small size, Large flow rate, full lift range, full voltage, suitable for household and commercial use;

Series Products Model Example

4 SK M -100

- 电机功率 Motor power
- 单相（三相不标注）
- 系列型号 Series number
- 4寸井径4-inch celiper

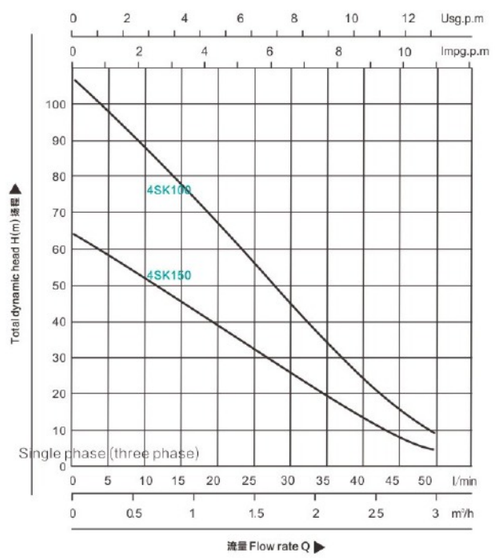

PERFORMANCE TABLE

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery											n=2850r/min
1~ 220V/240V	3~ 380V/415V	KW	HP	Q M³/H	0	5	10	15	20	25	30	35	40	45	50
				l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3
4SK(M)100	4SK100	0.75	1	扬程(m) Rang of lift	64	58	52	46	39	33	26	19	13	9	5
4SK(M)150	4SK150	1.1	1.5		107	98	88	78	68	57	46	34	24	16	9

QGD

不锈钢螺杆泵系列

stainless steel sc pump series

4" Screw Pump

Pump/Motor

Insulation class : B

Protection grade: IP68

Diameter: Φ4"

Highest temperature of liquid: 35℃

Series Products Model Example

QG D 1.2 - 50 - 0.37

- Motor power (KW)
- Head (m)
- Capacity (m^3/h)
- Single phase
- Series number

PERFORMANCE TABLE

n=2850r/min

型号 Model	功率 Power		扬程 Head max	流量 Flow max
220V/380V	KW	HP	m	m^3/h
QGD1.2-50-0.37	0.37	0.5	80	1.8
QGD1.2-50-0.50	0.50	0.67	80	2.5
QGD1.2-50-0.75	0.75	1	130	1.8

PARTS

配件

Control Box

Control Box

Iron Outlet

bearing

sand proof cup

clamping spring and end cover

impeller

impeller

outlet valve

lower bracket

capacitor

protector

oil sac

brass outlet and connector

SS outlet and connector

IRON OUTLET

coupling

Delivery

hexagonal rods